


# ECE3614

## Introduction to Communications Systems

### Fall 2007

---

Instructor: Dr. R. Michael Buehrer  
Lecture #15: Spectral Characteristics of  
Frequency Modulated Signals

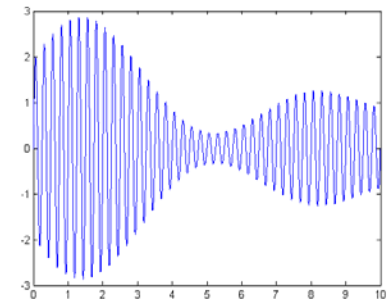

# Overview

---

- Today we continue our discussion of the spectral characteristics of FM signals
  - For a general measure of bandwidth, we can use Carson's Rule
  - For a more detailed description of the spectrum, we rely on approximations
  - Narrowband and wideband FM have very different behavior and thus we will examine them separately.
  
- Reading
  - Section 4.6

# Angle Modulation

---

- Phase Modulation:  $s_{PM}(t) = A_c \cos(2\pi f_c t + k_p m(t))$
- Frequency Modulation:  $s_{FM}(t) = A_c \cos\left(2\pi f_c t + k_f \int_{-\infty}^t m(\lambda) d\lambda\right)$

where

- $m(t)$  - message signal
- $A_c$  - signal amplitude
- $f_c$  - carrier frequency
- $k_p$  - phase sensitivity constant (radians/volt)
- $k_f$  - frequency deviation constant (radians/volt-second)


# Exact Calculation of FM Bandwidth

---

- Because FM modulation is nonlinear, calculation of bandwidth is extremely difficult.
- Book shows example for  $m(t) = \sin(2\pi f_m t)$ 
  - This is a standard textbook example
  - Result is somewhat complex and is in terms of the Bessel function
- The problem with this type of example
  - Doesn't tell us what the spectrum is for practical signals
  - Even adding another sinusoid is difficult because of nonlinear terms
- We would like a simple approximate formula for bandwidth


# Example

- Recall our previous example for a sinusoidal message with  $f_c = 1\text{kHz}$  and  $f_m = 50\text{Hz}$ ,  $\beta=1$ ,  $\beta=5$
- Since  $\beta = \Delta f / f_m \rightarrow \Delta f = 50\text{Hz}, 250\text{Hz}$

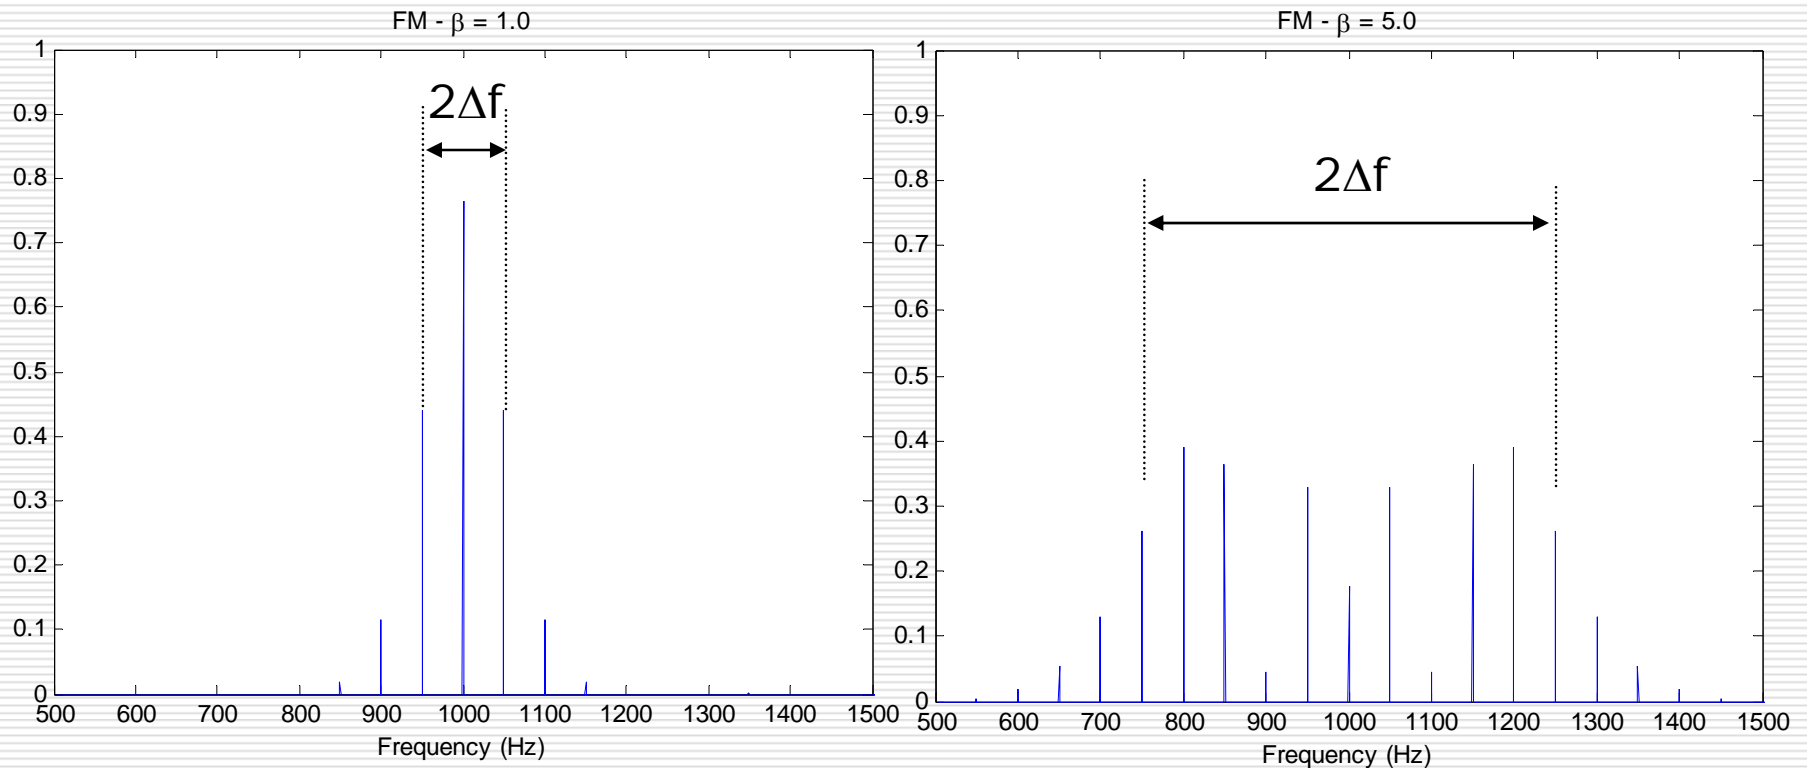

# Example – cont.

- Further for a sinusoidal message with  $f_c = 1\text{kHz}$  if we hold  $\Delta f$  constant at  $\Delta f = 5\text{Hz}$  and let  $\beta=1$ ,  $\beta=5$
- Since  $\beta = \Delta f / f_m \rightarrow f_m = 5\text{Hz}$ ,  $1\text{Hz}$

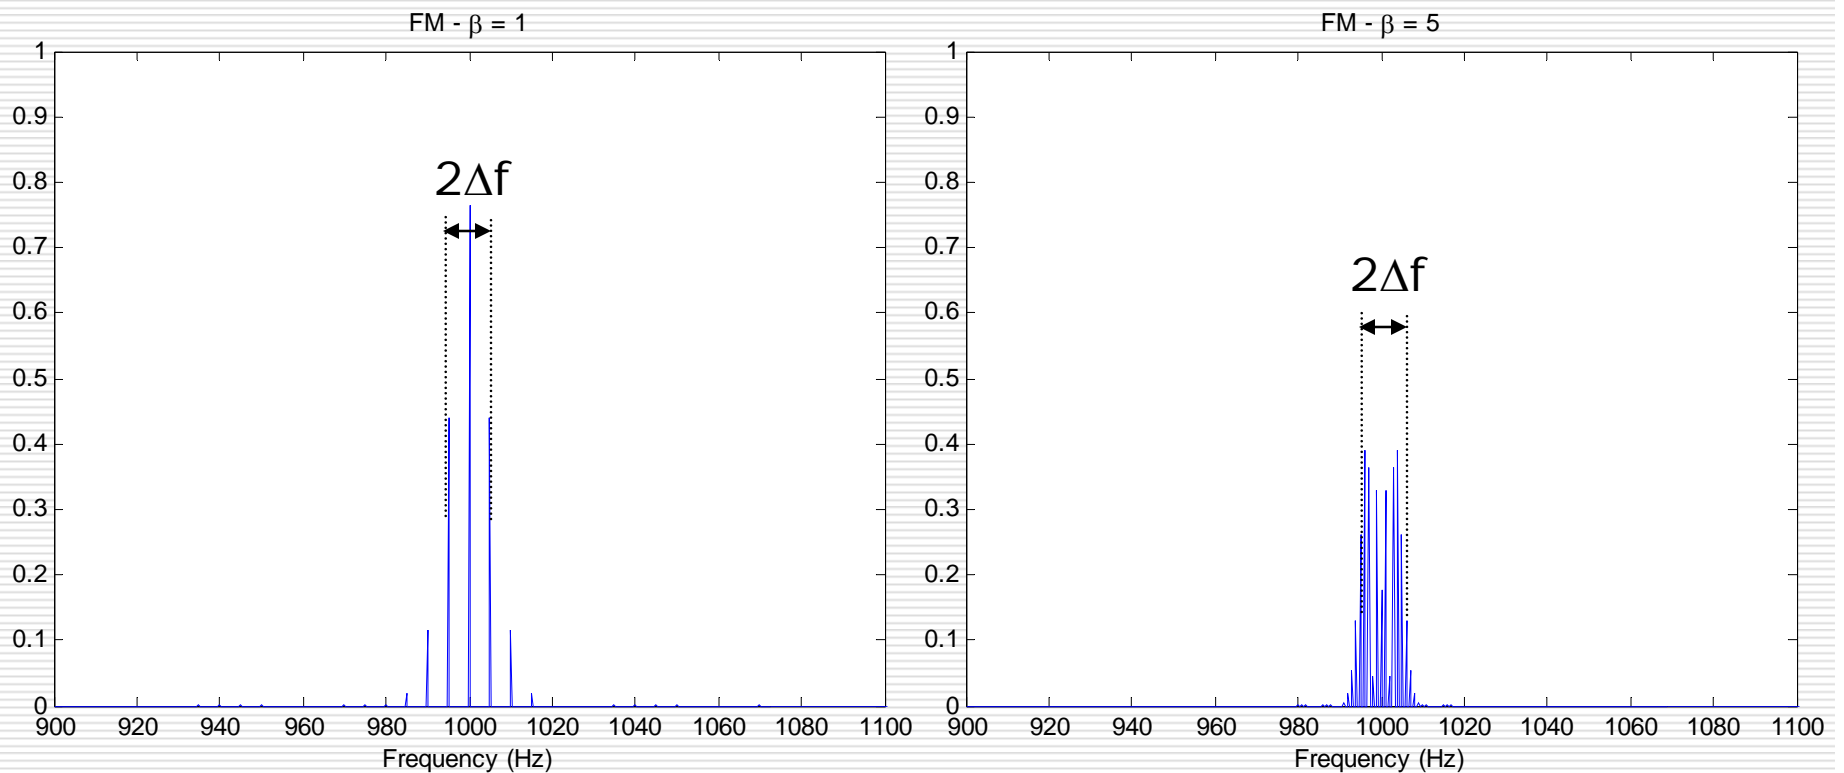

# Bandwidth

---


- We can see that while the absolute bandwidth may be infinite, the number significant frequency components (i.e., the practical bandwidth) is finite and related to  $\Delta f$ .
- Increasing  $f_m$  increases bandwidth, but,  $2\Delta f$  is a better measure for the significant bandwidth for higher values of  $\beta$ .
- This lead to Carson's rule for bandwidth of a sinusoidally modulated FM signal:

$$BW_{FM} \approx 2\Delta f + 2f_m = 2\Delta f \left(1 + \frac{1}{\beta}\right)$$

# Universal BW - Sinusoidal Message

---

$$\frac{BW_{FM}}{\Delta f} \approx 2 \left( 1 + \frac{1}{\beta} \right)$$

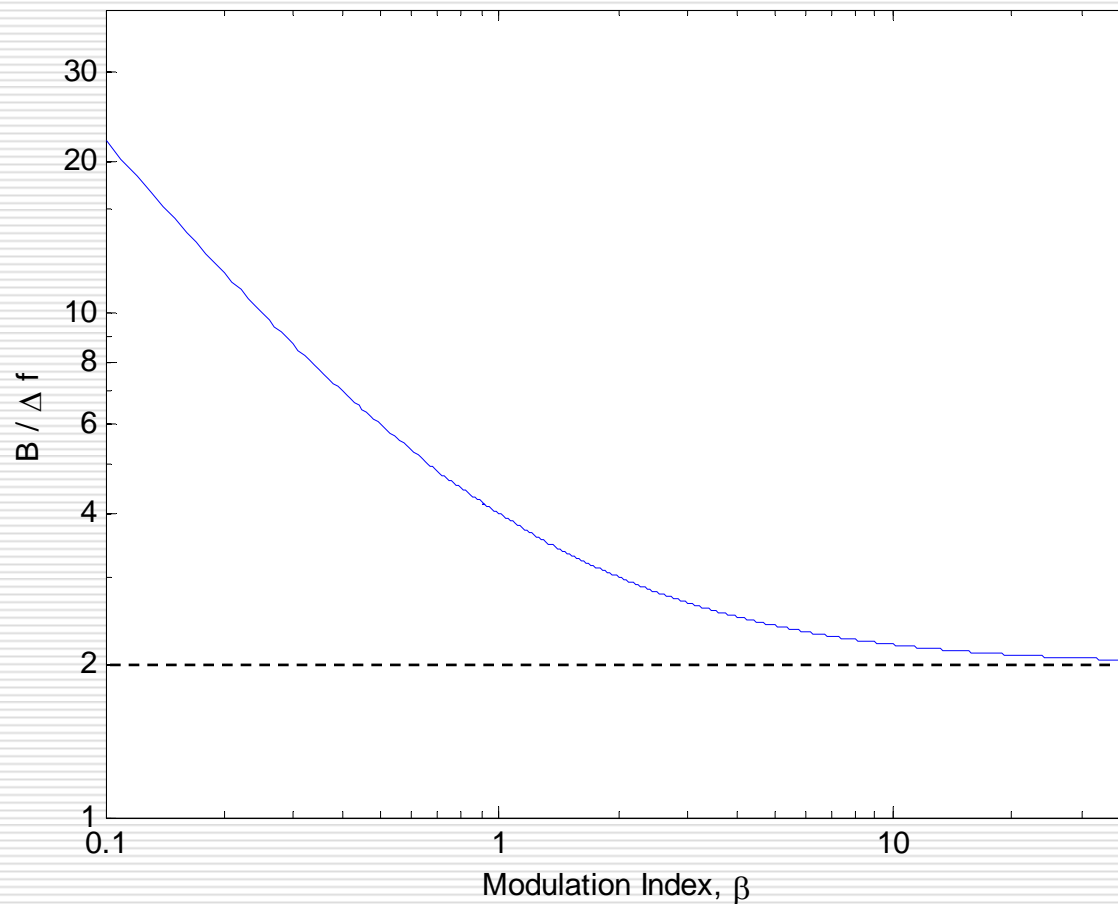

# 99% Bandwidth

---

- Recall that the spectrum for a sinusoidal modulated FM wave is

$$S(f) = A_c \sum_{n=-\infty}^{\infty} J_n(\beta) \{ \delta(f - f_c - n f_m) + \delta(f + f_c + n f_m) \}$$

- The power in the signal is determined as

$$P = A_c^2 \sum_{n=-\infty}^{\infty} J_n^2(\beta)$$

- We can determine the number of side frequencies which contain 99% of the total power as

$$0.99P = A_c^2 \sum_{n=-k}^k J_n^2(\beta)$$

$$0.99 = J_0^2(\beta) + 2 \sum_{n=1}^k J_n^2(\beta)$$

# 99% Bandwidth

---

- The 99% bandwidth is then simply


$$B_{99} = 2kf_m$$

- The normalized 99% bandwidth is then


$$\begin{aligned}\bar{B}_{99} &= \frac{2kf_m}{\Delta f} \\ &= \frac{2k}{\beta}\end{aligned}$$

# 99% Bandwidth Curve

---

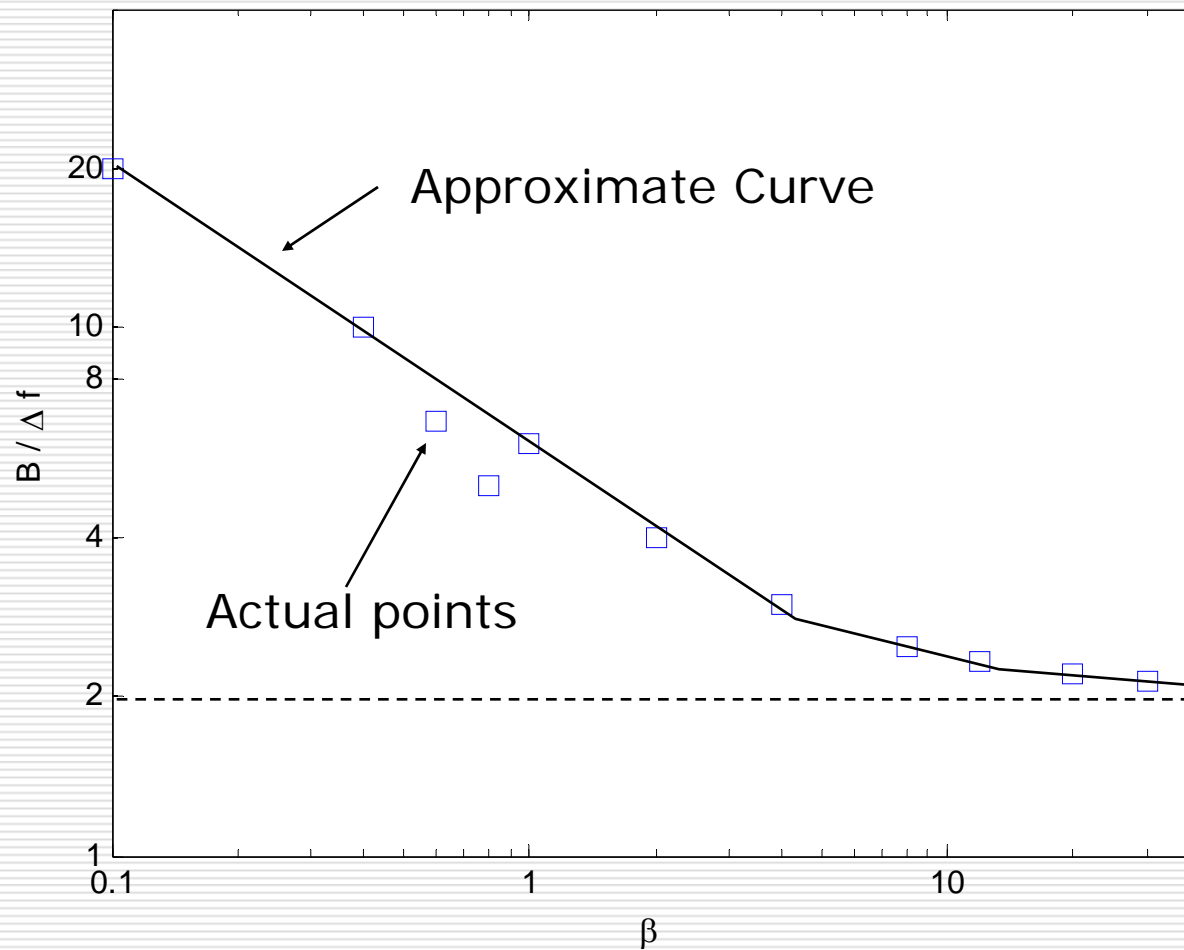

# 99% BW vs. Carson's Rule

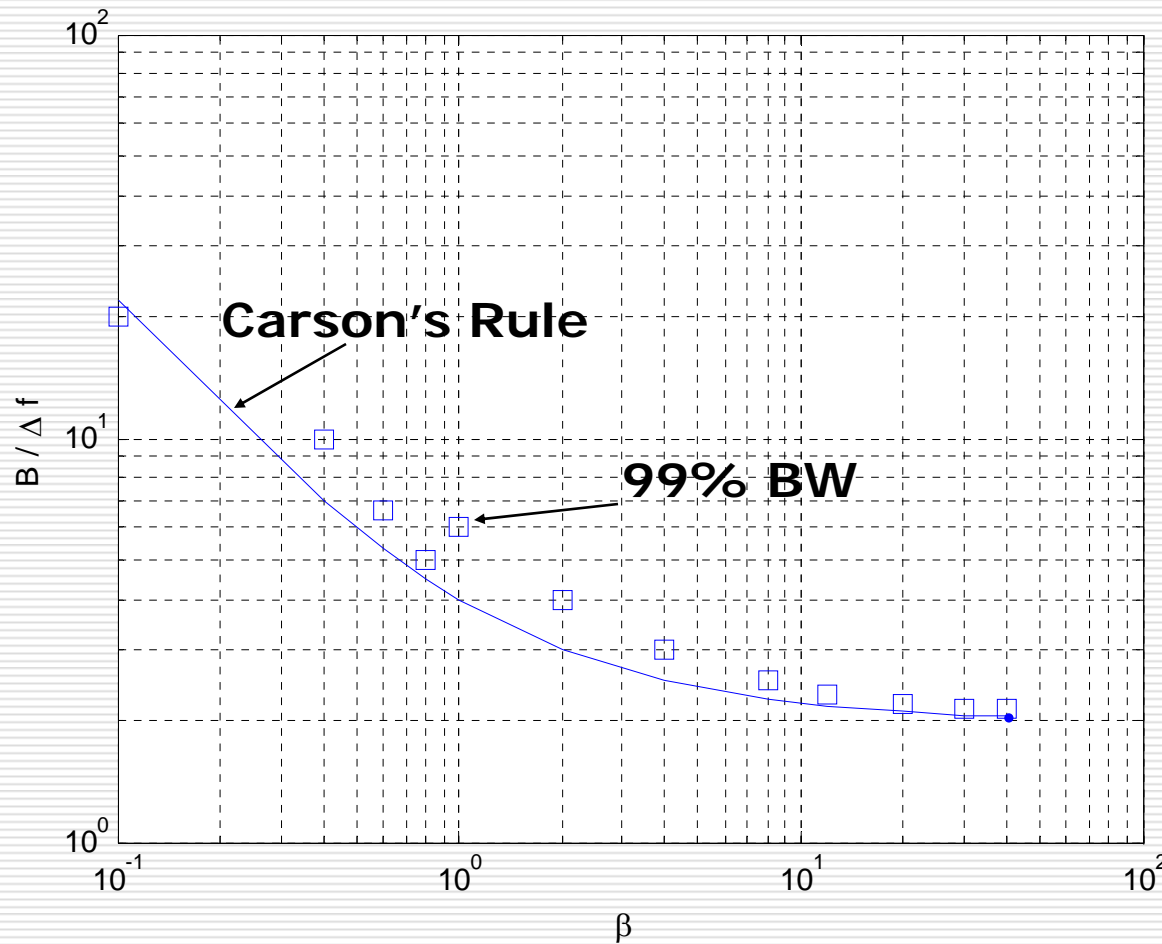

- Carson's rule tends to slightly under-estimate bandwidth as compared to the 99% BW
- However, Carson's rule still provide a reasonable estimate

# Carson's Rule – General Signals

---

- Carson's rule as described applies to sinusoidal signals
- However, we can define a ratio similar to the modulation index for general message signals
- Deviation Ratio  $D$ :

$$D = \frac{\Delta f}{W}$$

where  $\Delta f$  is the highest instantaneous frequency deviation and  $W$  is the bandwidth of the message signal.

- The generalized Carson Rule is then written as

$$BW_{FM} = 2\Delta f + 2W$$

# Carson's Rule – General Signals

---

- Approximately 98% of the power in an FM signal lies within the bandwidth:

$$BW_{FM} = 2\Delta f + 2W = 2(D+1)W$$

- This formula provides a very good approximation to bandwidth
  - No information concerning the shape of spectrum
- Interpretation:

$$BW_{FM} = 2(D+1)W = 2\left(\frac{\Delta f}{W} + 1\right)W = 2\Delta f + 2W$$

- Bandwidth corresponds to frequency deviation around carrier frequency plus bandwidth of message signal
- Deviation ratio tells us the extra bandwidth required by the FM signal (compared to  $2W$  required by DSBSC)

# Wideband and Narrowband FM

---

- Depending on value of  $D$  FM performs quite differently
  - Identical to changing  $\beta$  for sinusoidal message signals
- Wideband FM
  - $D > 1$
  - We will usually consider this case
- Narrowband FM
  - $D < 0.2$
  - Behaves similarly to AM
- There is an in-between region:  $0.2 < D < 1$ 
  - For simplicity, we will consider  $D < 1$  to be **narrowband**

# Spectrum - Narrowband FM

---

$$s_{FM}(t) = A_c \cos \left( 2\pi f_c t + k_f \int_{-\infty}^t m(\lambda) d\lambda \right)$$

□ For  $\theta(t) \ll 1 \rightarrow \cos(\omega_c t + \theta(t)) \approx \cos(\omega_c t) - \theta(t) \sin(\omega_c t)$

□ Small  $D$  implies small  $k_f$ . Therefore for  $D \ll 1$


$$s_{NBFM}(t) = A_c \cos(2\pi f_c t) - \left( A_c k_f \int_{-\infty}^t m(\lambda) d\lambda \right) \sin(2\pi f_c t)$$

■ This resembles large carrier AM except that the message is in quadrature

□ Spectrum: 
$$S_{NBFM}(f) = \frac{A_c}{2} [\delta(f - f_c) + \delta(f + f_c)] + \frac{A_c k_f}{2} \left[ \frac{1}{(f - f_c)} M(f - f_c) + \frac{1}{(f + f_c)} M(f + f_c) \right]$$

# Example of NBFM Spectrum

□  $M(f) = F\{m(t)\}$

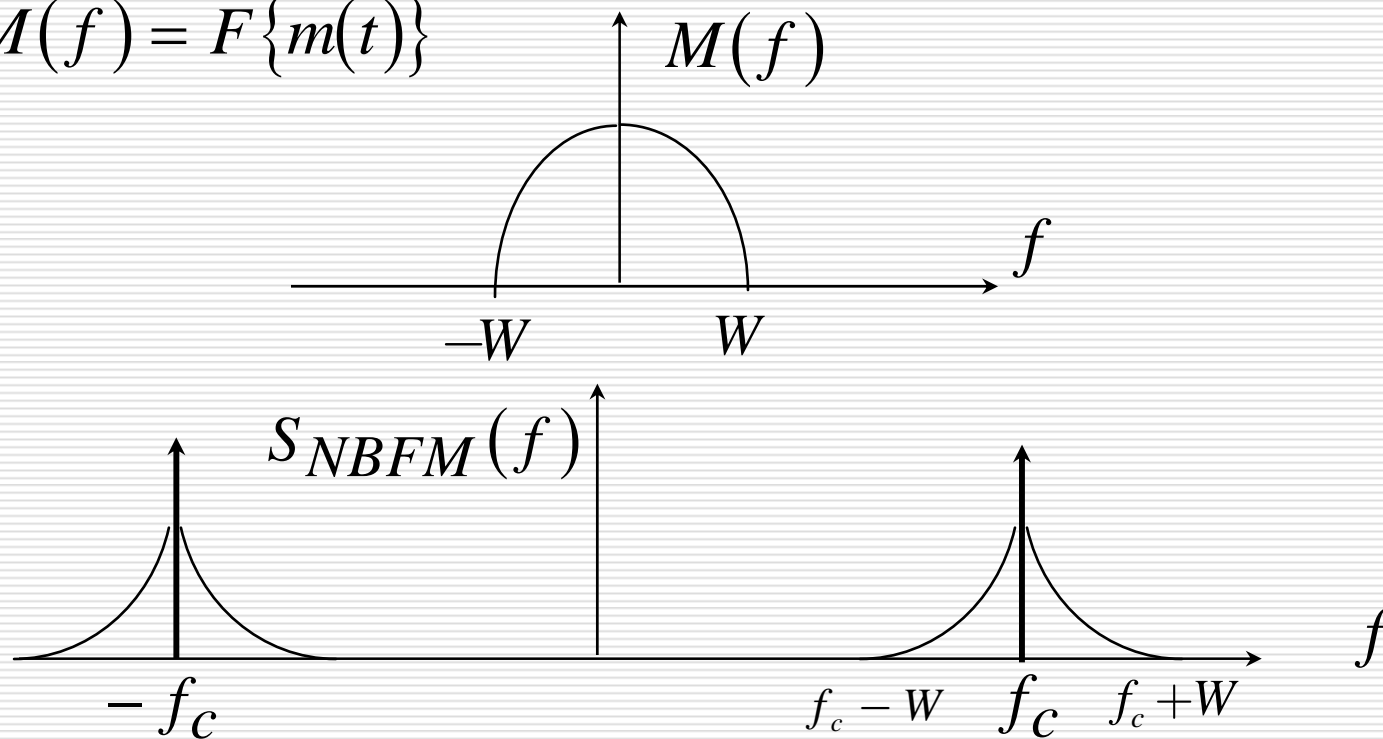

□ BW of NBFM:  $2W$  (close to Carson's Rule)

Carson's Rule:  $BW_{FM} = 2(D+1)W \approx 2W$   
since  $D \ll 1$

# Spectrum of Wideband FM

---


- The instantaneous frequency of the signal is directly proportional to the value of  $m(t)$
- If we know the **probability distribution function** (pdf) of  $m(t)$  we can determine the average spectral properties of  $s(t)$  – (i.e., power spectral density)

$$S_{WBFM}(f) = \frac{A_c^2}{4k_f} \left[ p_m \left( \frac{1}{k_f} (f - f_c) \right) + p_m \left( \frac{1}{k_f} (-f - f_c) \right) \right]$$


- where  $p_m(x)$  is the pdf of the message signal
- Careful!
  - PDFs and PSDs are two very different things
  - *For this case only, the PSD is proportional to the PDF*

# Example of PSD for WBFM

- Probability Density Function (PDF) for Message Signal

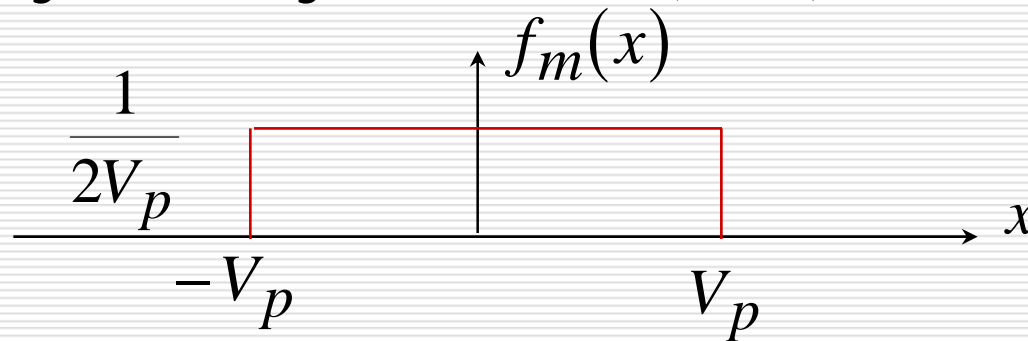

- Power Spectral Density  $R_{WBFM}(f)$

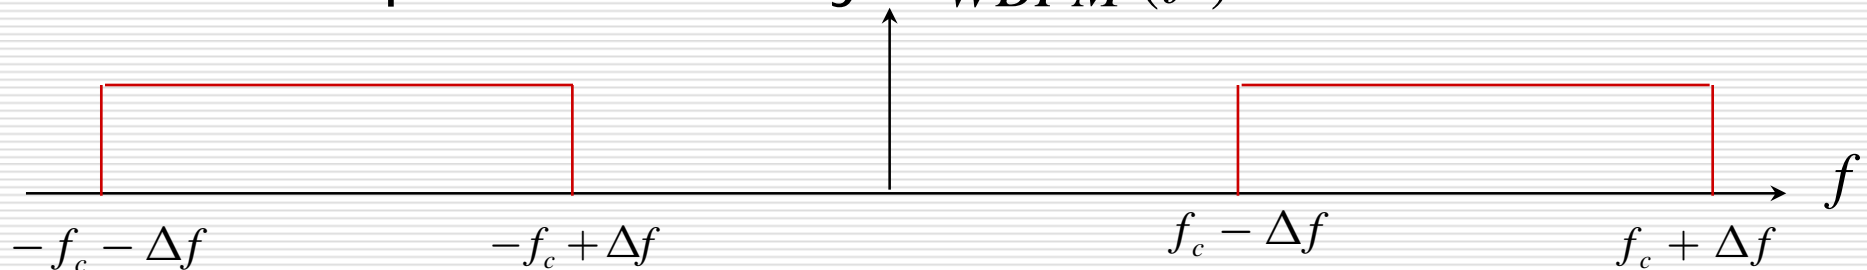

Carson's Rule:  $BW_{FM} = 2\Delta f + 2W \approx 2\Delta f$

since  $W \ll \Delta f \rightarrow D \gg 1$



Intro to Comm. Fall 2007

R.M. Buehrer

# Example A

---


□ Consider the following message signal

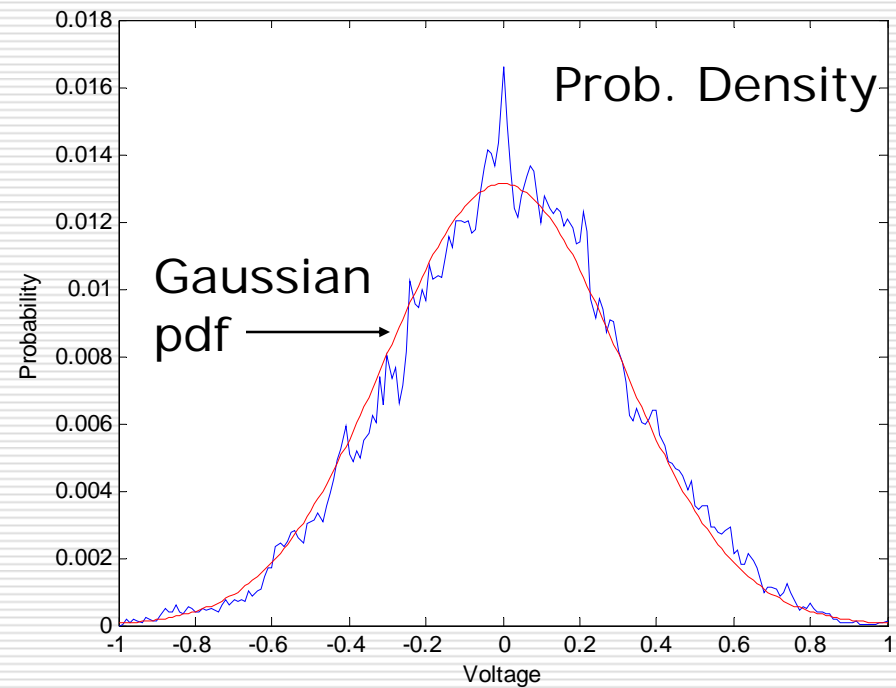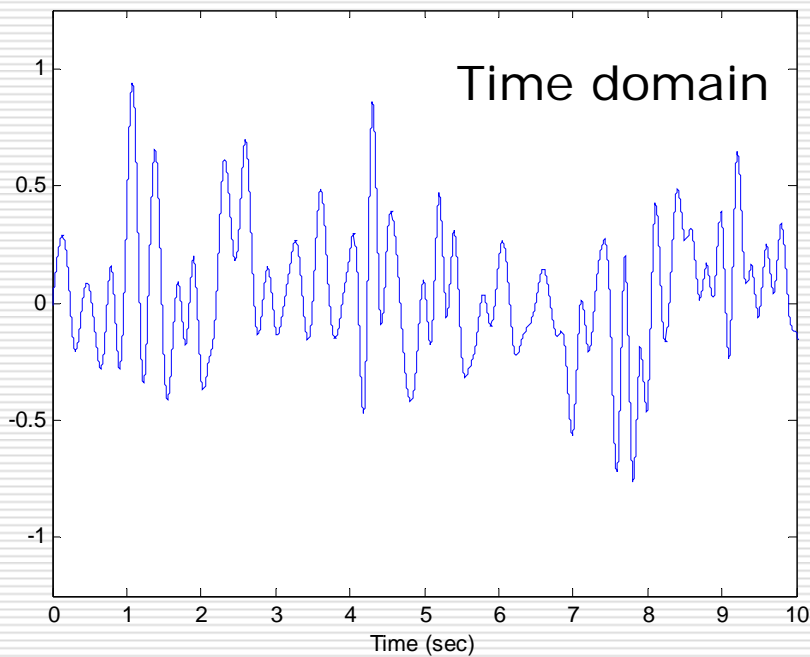

# Example A – cont.

---

## □ Message Signal – Frequency domain


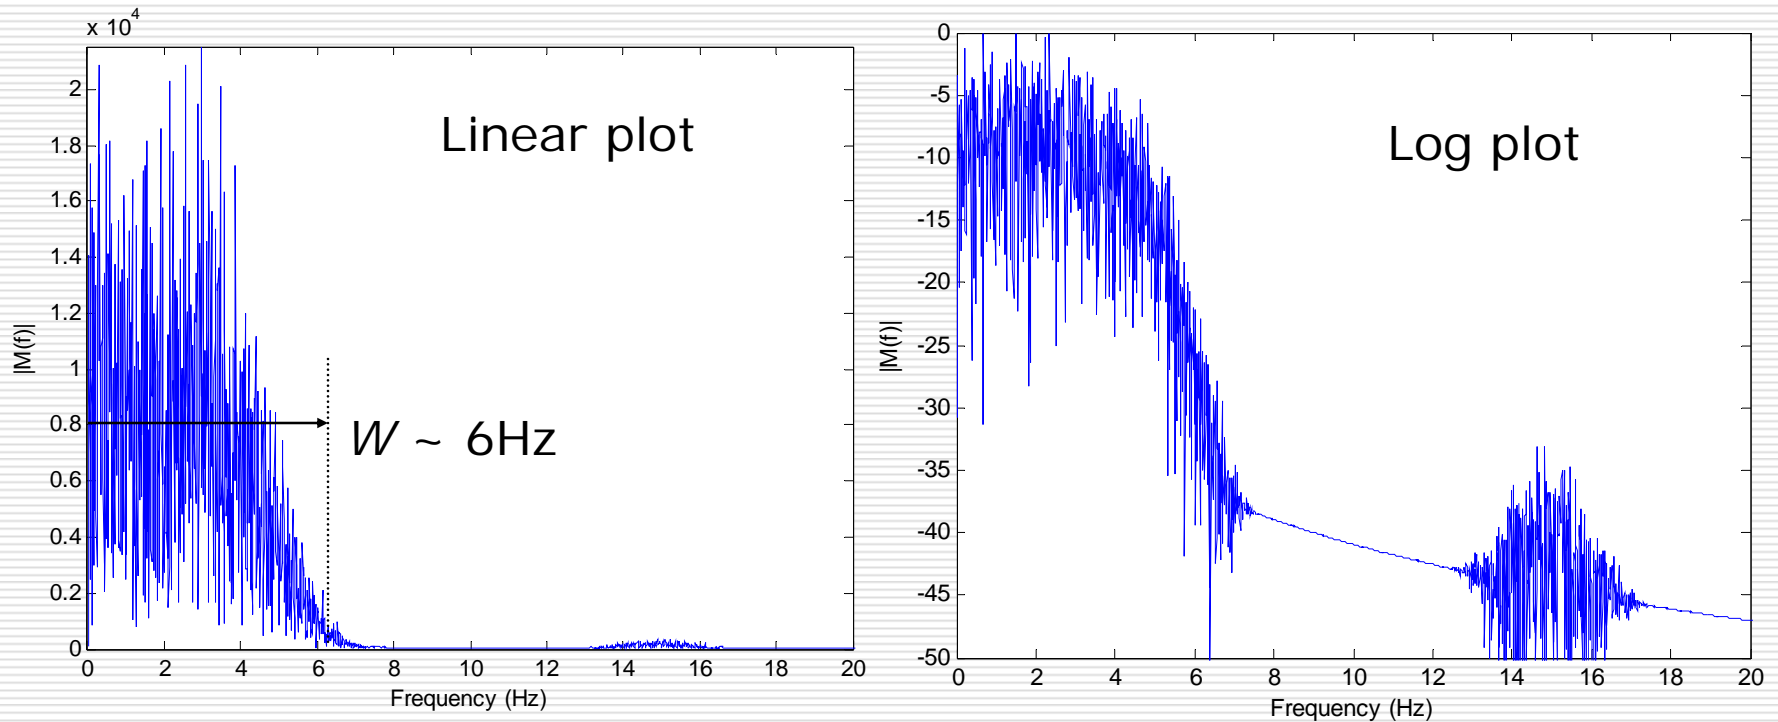


# Example A – Narrowband FM Signal

□ For  $D = 0.16$  and  $\Delta f = 1$

Strong tone


By Carson's Rule:  $B = 2\Delta f + 2W = 14\text{Hz}$

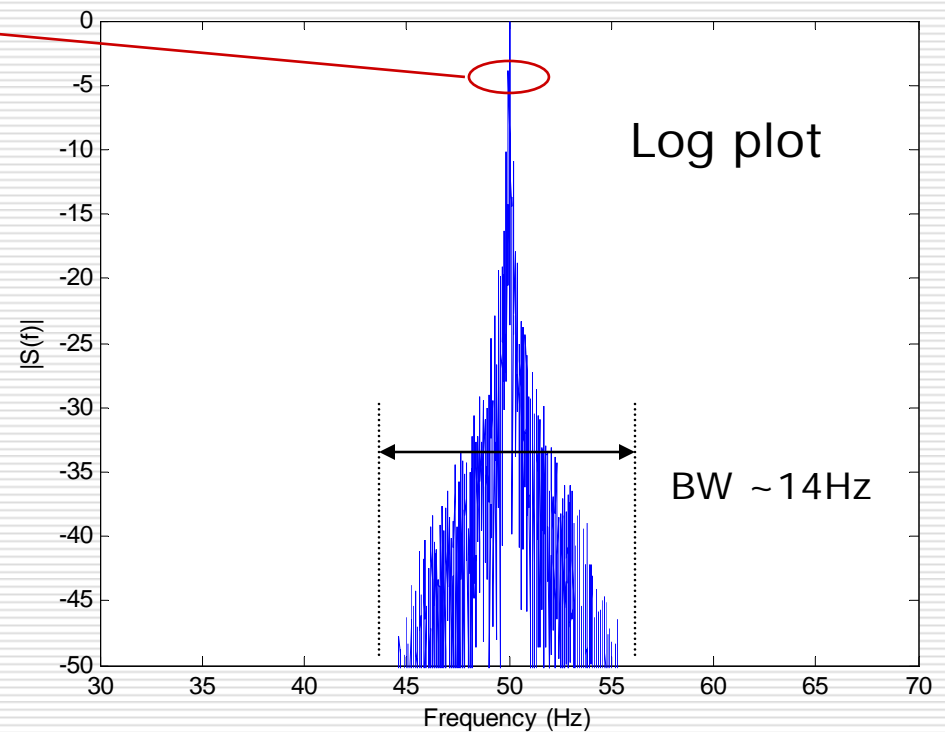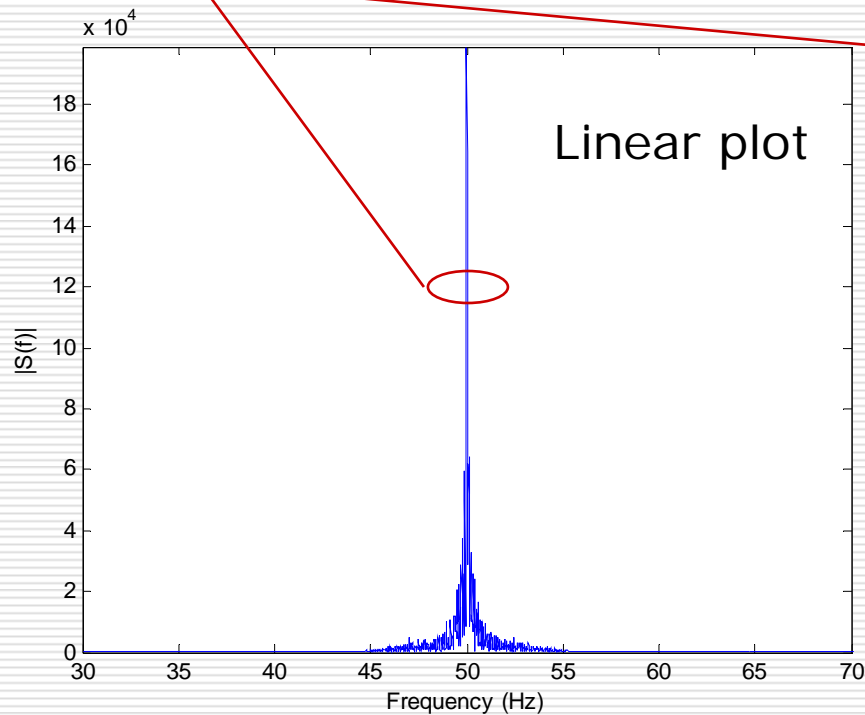

# Example A – Wideband FM Signal

□ For  $D = 1.6$  and  $\Delta f = 10$


By Carson's Rule:  $B = 2\Delta f + 2W = 32\text{Hz}$

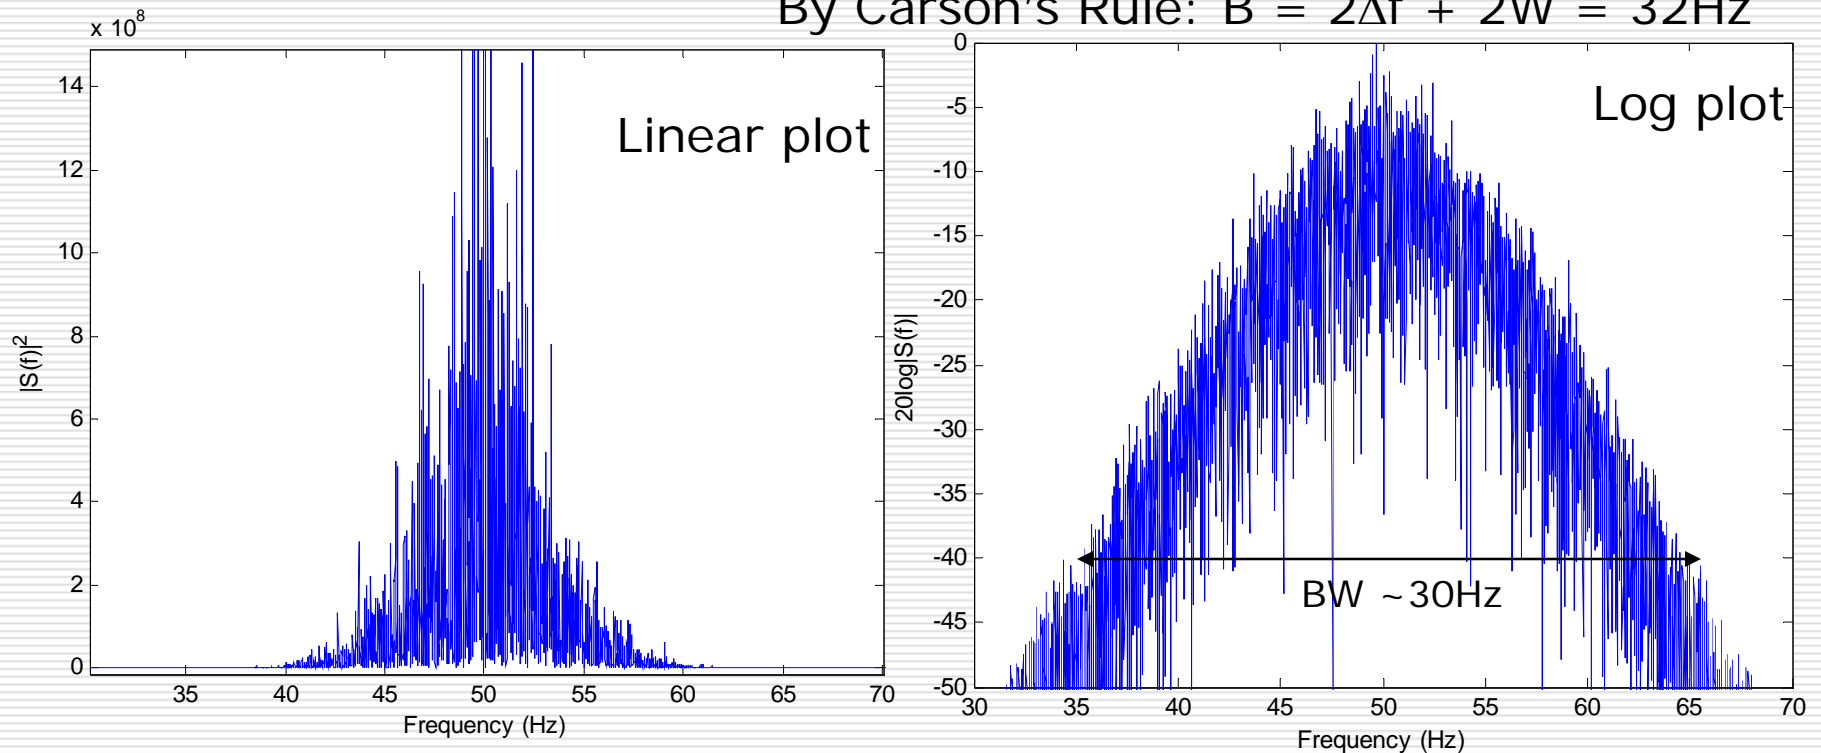

# Example B – Digital Message

---


## □ Message Signal

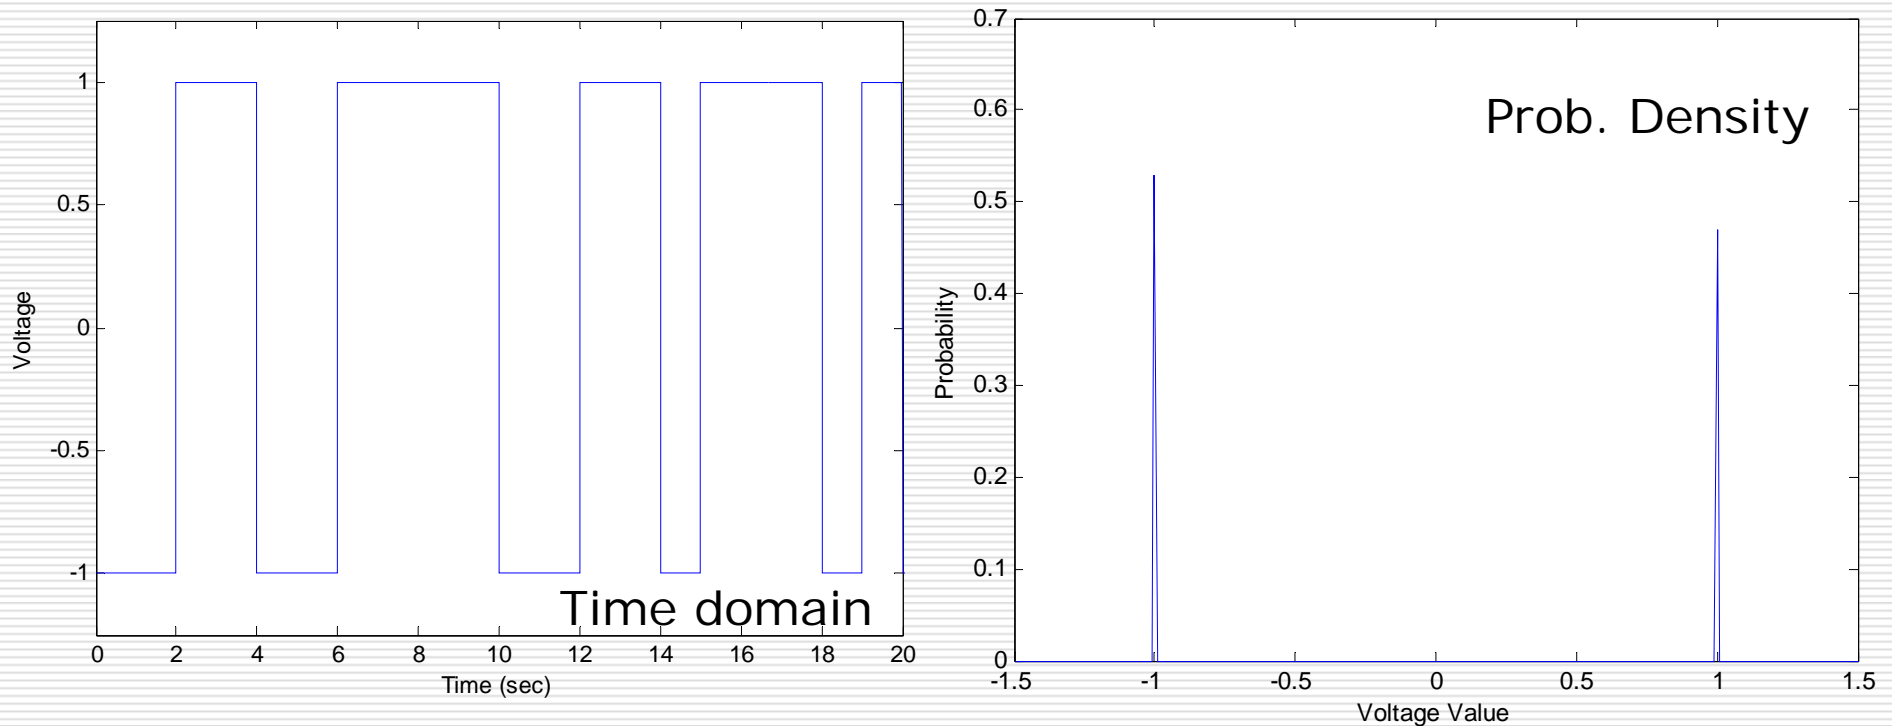

# Example B – Digital Message


---

- Message Spectrum
- First Null bandwidth = 1Hz

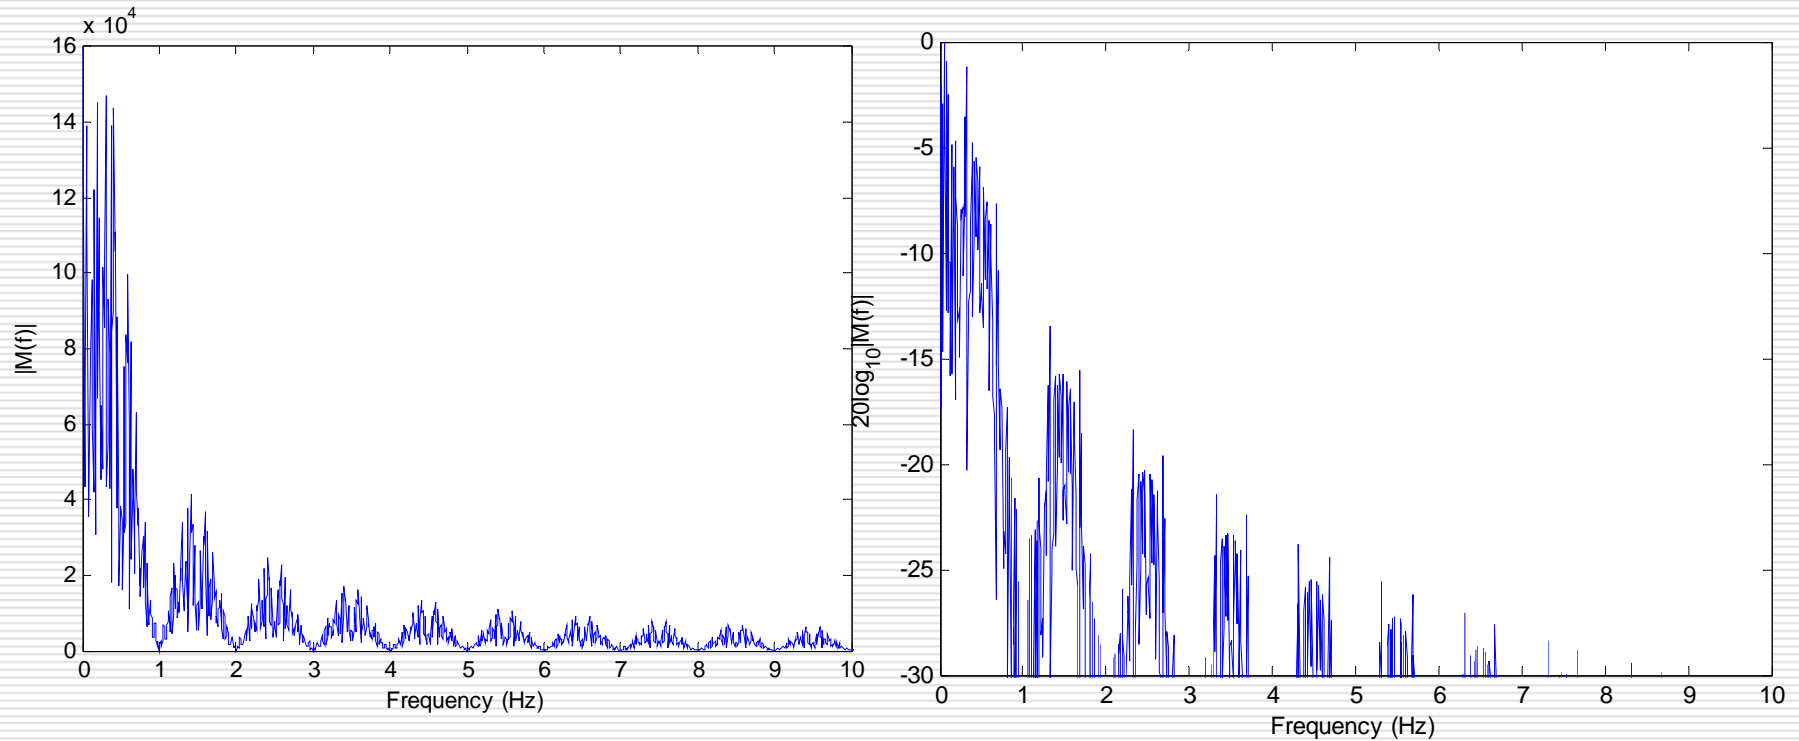


# Example B – Narrowband FM

- $\Delta f = 1\text{Hz}$ ,  $W = 1\text{Hz}$
- Carson's Rule:  $B = 2\Delta f + 2W = 4\text{Hz}$
- Spectrum resembles message spectrum as expected

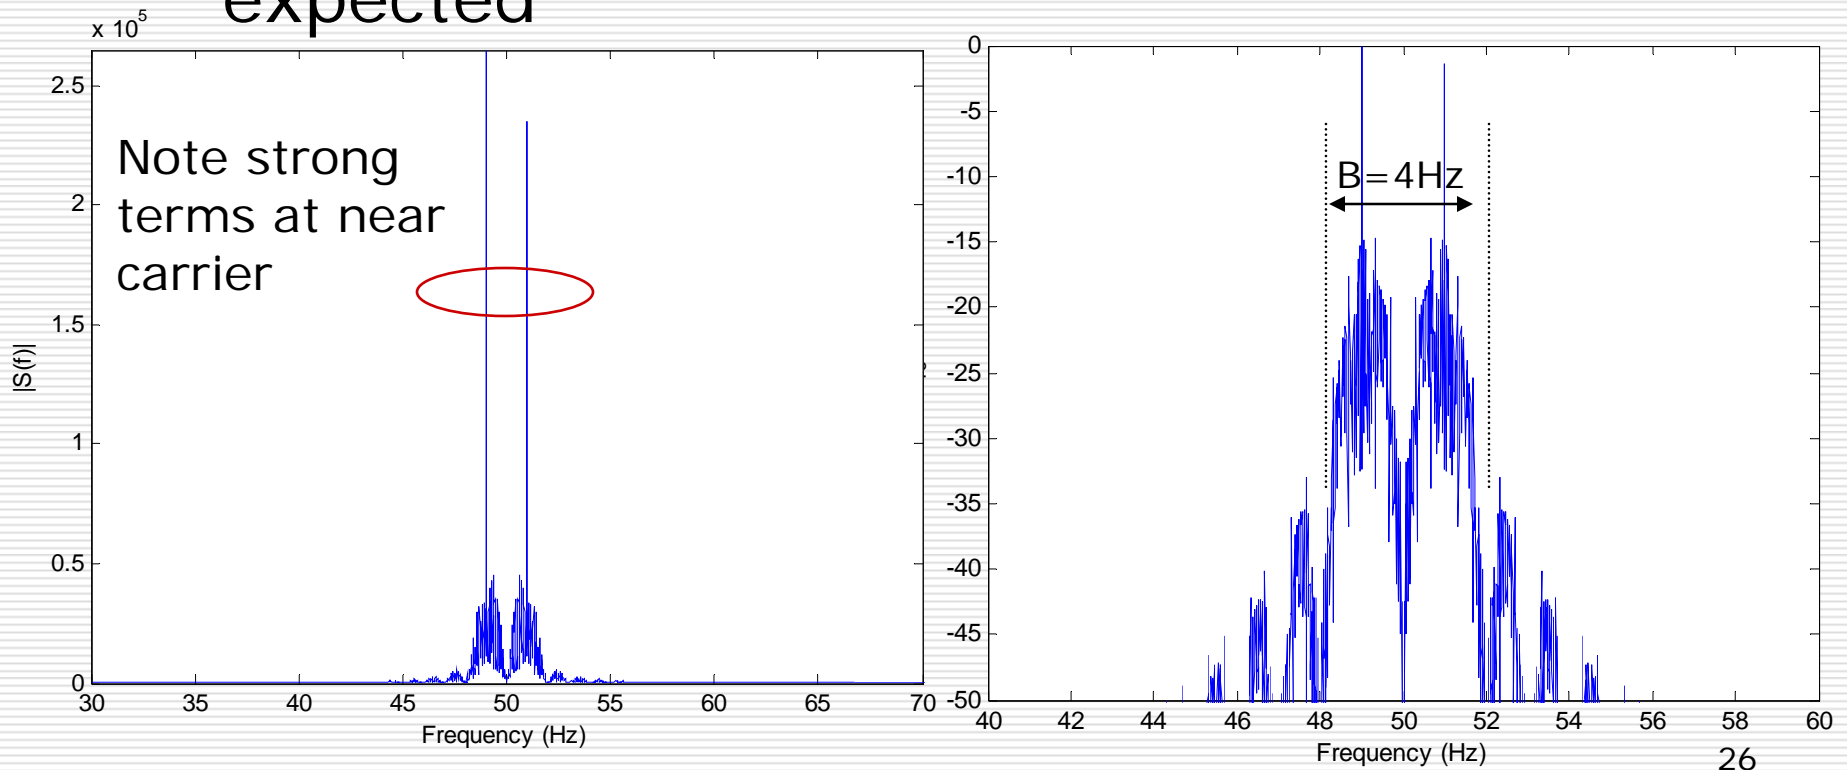

# Spectrum – Wideband FM

- $\Delta f = 10\text{Hz}, W = 1\text{Hz}$
- Carson's Rule:  $B = 2\Delta f + 2W = 22\text{Hz}$
- Spectrum more closely resembles the pdf

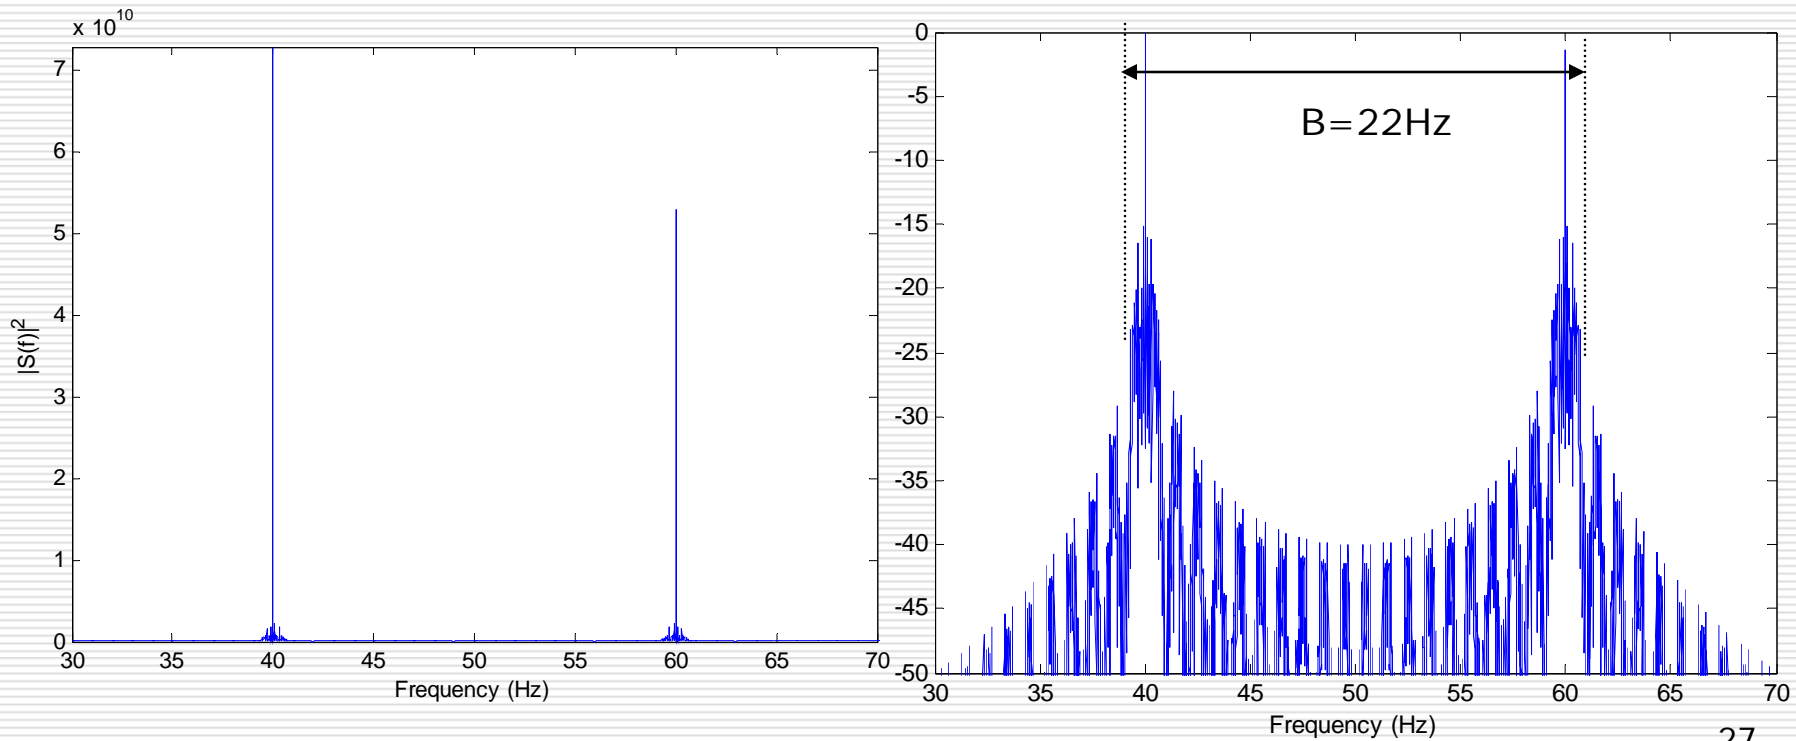

# Summary

---

- If all you need is decent measure of BW, use Carson's Rule
- If you need to determine a better approximation of the spectrum, determine from  $D$  whether you have WBFM or NBFM
  - If the signal is narrowband, use spectrum of the message signal to approximate the spectrum of the FM signal, similar to AM
  - If the signal is wideband, use the probability density function to approximate the spectrum (PSD)