


# ECE3614

## Introduction to Communications Systems

### Fall 2007

---

Instructor: Dr. R. Michael Buehrer  
Lecture #17: Frequency Modulation  
– System Examples and Example  
Problems

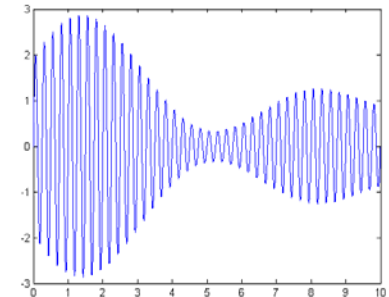

# Overview



---

- The Objective of today's lecture is to wrap up our discussion of the characteristics of FM signals by discussing a few examples
- In particular we will examine broadcast FM
  
- Reading
  - 4.9

# Example 17.1

---

- A message signal has the following characteristics

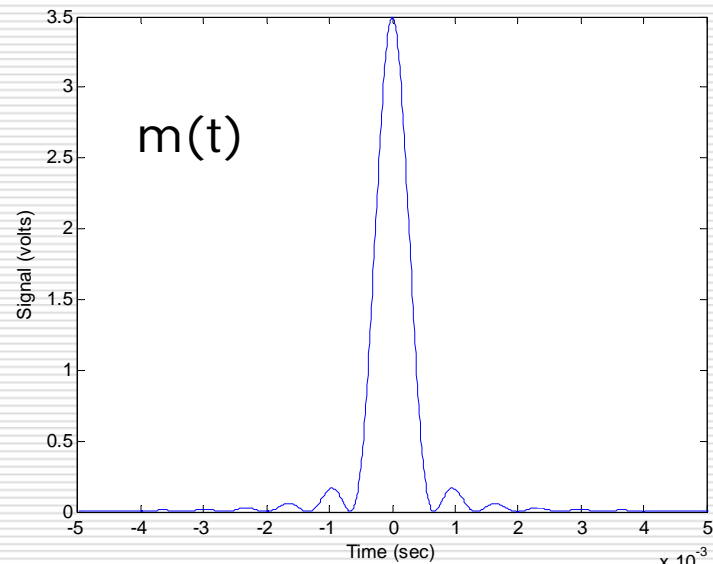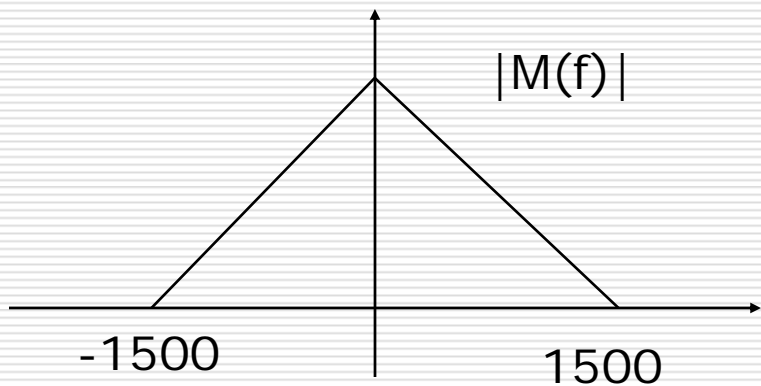

- If an FM system has a bandwidth of 10kHz, determine the value of  $k_f$  that allows for full bandwidth utilization.

# Example 17.1 – cont.

---

- The bandwidth is related to  $k_f$  through

$$BW = 2\Delta f + 2W$$

- From the previous slide we know that

$$BW = 10\text{kHz} \text{ and } W = 1500\text{Hz}$$

- Thus:

$$2\Delta f = BW - 2W$$

$$= 10\text{kHz} - 3\text{kHz} = 7\text{kHz}$$

$$\Delta f = 3.5\text{kHz}$$

# Example 17.1 – cont.

---


- Further, since  $\Delta f = k_f V_p$  and the peak voltage is found to be 3.5V

$$\begin{aligned}k_f &= \frac{\Delta f}{V_p} \\ &= \frac{3.5\text{kHz}}{3.5} \\ &= 1000\end{aligned}$$

# Example 17.2

---

- Consider the following message signal:

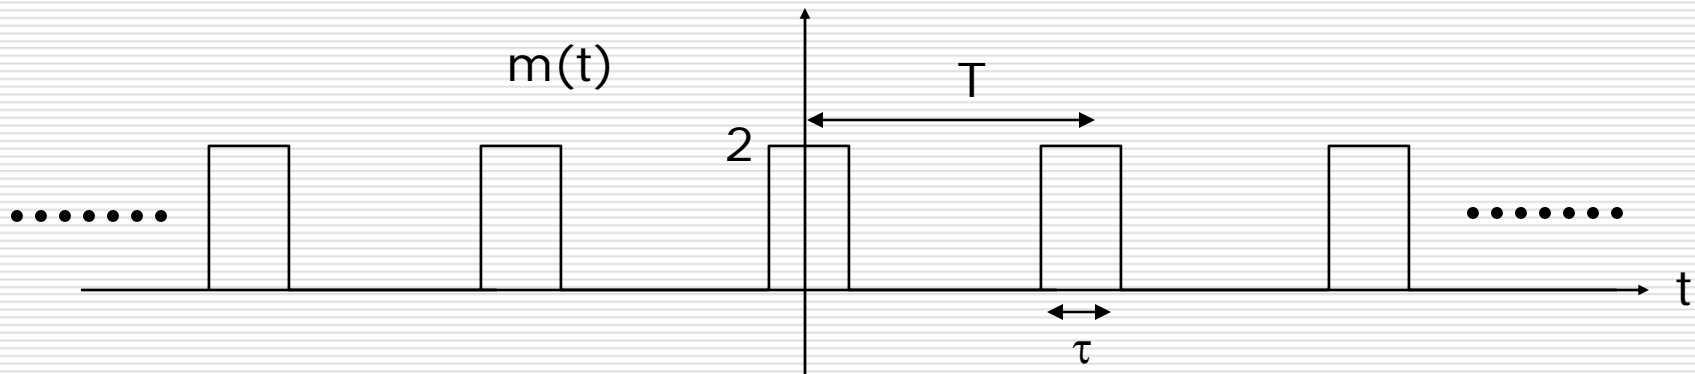

- If the message signal above is frequency modulated with  $k_f = 1000$  and  $f_c = 100\text{kHz}$ , plot an approximate spectrum. The signal period  $T = 1\text{ms}$  and  $\tau = 50\mu\text{s}$ .

# Example 17.2 – cont.

---

- In order to determine the spectrum we first need to determine whether the FM signal is narrowband or wideband. This can be determined from  $D = \Delta f / W$ .
- $\Delta f$  is found as  $\Delta f = k_f * V_p = 1000 * 2 = 2000$ .
- If  $D < 0.2$ , the signal is narrowband otherwise we assume that it is wideband.
- This means that if  $W > 2000/0.2 = 10000$  then we have narrowband FM.
  - Note that increasing  $W$  increases the bandwidth of the FM signal, but decreases the relative modulation index making it narrowband FM
- To determine the bandwidth  $W$  we require the spectrum of the message.

# Ex. 17.2 - Message Spectrum

---

- The message is a periodic (thus power) signal
- The spectrum of periodic signal can be determined from the Fourier Series as

$$M(f) = \sum_{n=-\infty}^{\infty} c_n \delta(f - nf_o)$$

- Since the Fourier Series coefficients are

$$c_n = \frac{A\tau}{T_o} \operatorname{sinc}\left(\frac{n\tau}{T}\right)$$


- The spectrum is

$$\begin{aligned} M(f) &= \sum_{n=-\infty}^{\infty} c_n \delta(f - nf_o) \\ &= A\tau f_o \sum_{n=-\infty}^{\infty} \operatorname{sinc}(n\tau f_o) \delta(f - nf_o) \end{aligned}$$

where  $f_o = 1/T$

# Message Spectrum – cont.


---

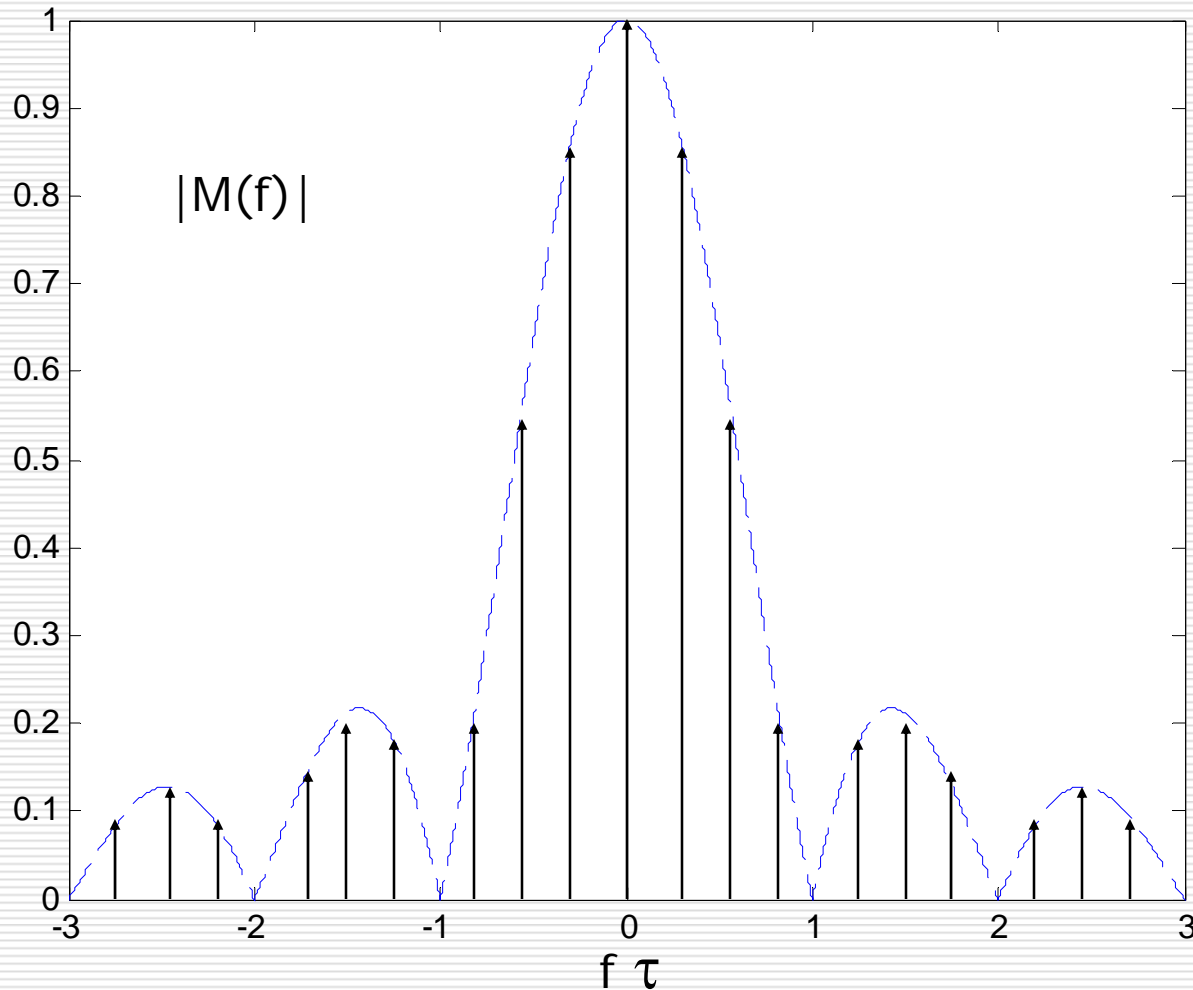

- Discrete Spectrum
- Spectral lines are separated by the fundamental frequency  $1/T$
- First null bandwidth is  $W \sim 1/\tau$

# Message Spectrum – cont.

---

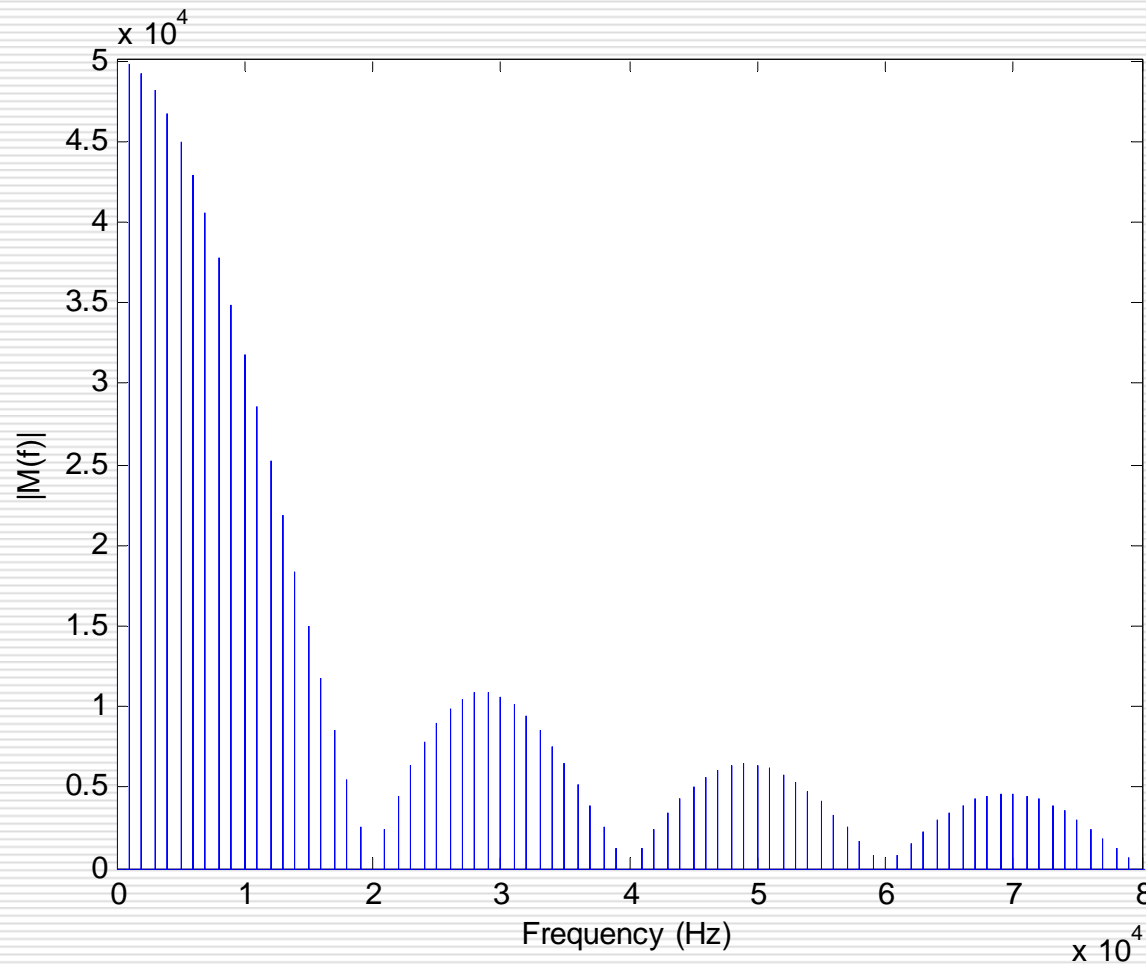

- Spectral lines at  $1/T = 1\text{kHz}$
- First null at  $f = T/\tau * 1/T$

# Example 17.2 – cont.

---

- With  $T = 1\text{ms}$  and  $\tau = 50\mu\text{s}$ , we find that the “first-null” bandwidth is approximated by
  - $W \sim f = T/\tau * 1/T = 1/\tau = 20\text{kHz}$
- For narrowband FM we require  
 $W > 10000$

Thus, we have a narrowband FM signal.

(Note that  $D = \Delta f/W = 2000/2000 = 0.1$ )

# Ex. 17.2 - Narrowband Spectrum

---

- The narrowband spectrum can be approximated using the AM approximation:


$$\begin{aligned} S_{NBFM}(f) &= \frac{A_c}{2} [\delta(f - f_c) + \delta(f + f_c)] \\ &\quad + \frac{A_c k_f}{2} \left[ \frac{M(f - f_c)}{(f - f_c)} + \frac{M(f + f_c)}{(f + f_c)} \right] \\ &= \frac{A_c}{2} [\delta(f - f_c) + \delta(f + f_c)] + \frac{A_c A k_f \tau f_o}{2(f - f_c)} \sum_{n=-\infty}^{\infty} \text{sinc}(n\tau f_o) \delta(f - n f_o - f_c) \dots \\ &\quad + \frac{A_c A k_f \tau f_o}{2(f + f_c)} \sum_{n=-\infty}^{\infty} \text{sinc}(n\tau f_o) \delta(f - n f_o + f_c) \end{aligned}$$

# Approximated vs. Actual Spectrum

---

Approximate

Actual (using Fourier Transform of signal)

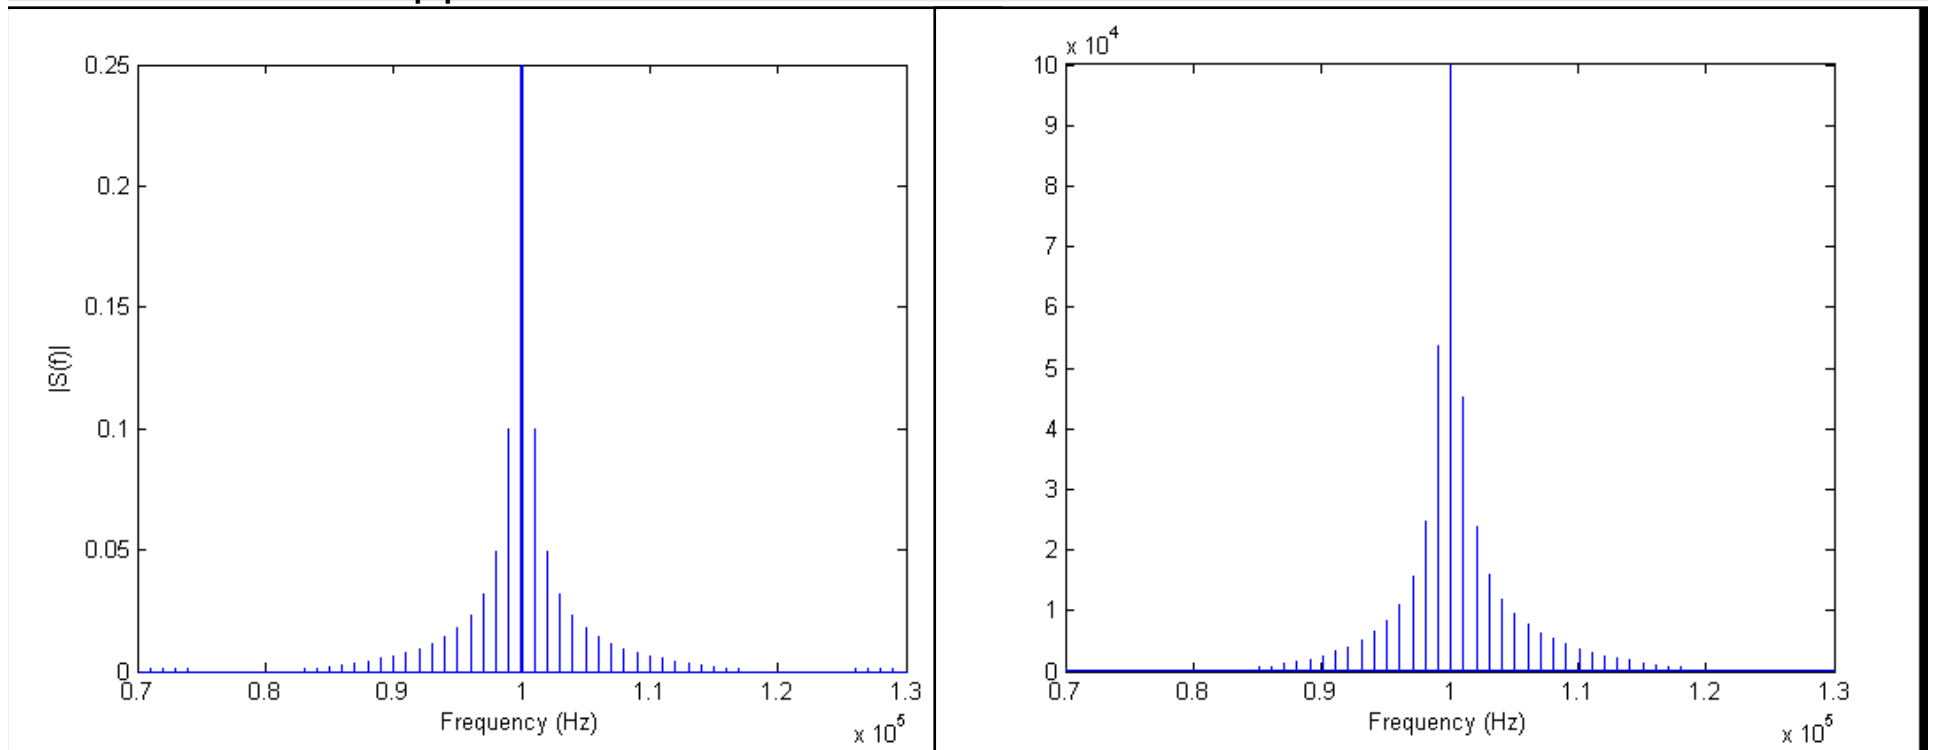

# Ex. 17.2 - Wideband Spectrum

---


- Let's change the message such that  $T = 100\text{ms}$  and  $\tau = 50\text{ms}$ . In this case
  - $W \sim f = T/\tau * 1/T = 1/\tau = 200\text{Hz}$
  - Since  $W \ll 10000$ , we have wideband FM
  - Specifically,  $D = \Delta f / W = 2000/200 = 10$
  - We can use the wideband approximation

$$S_{WBFM}(f) = \frac{A_c^2}{4k_f} \left[ P_m \left( \frac{1}{k_f} (f - f_c) \right) + P_m \left( \frac{1}{k_f} (-f - f_c) \right) \right]$$


# Wideband Spectrum – cont.

---

- The pdf of the message signal is

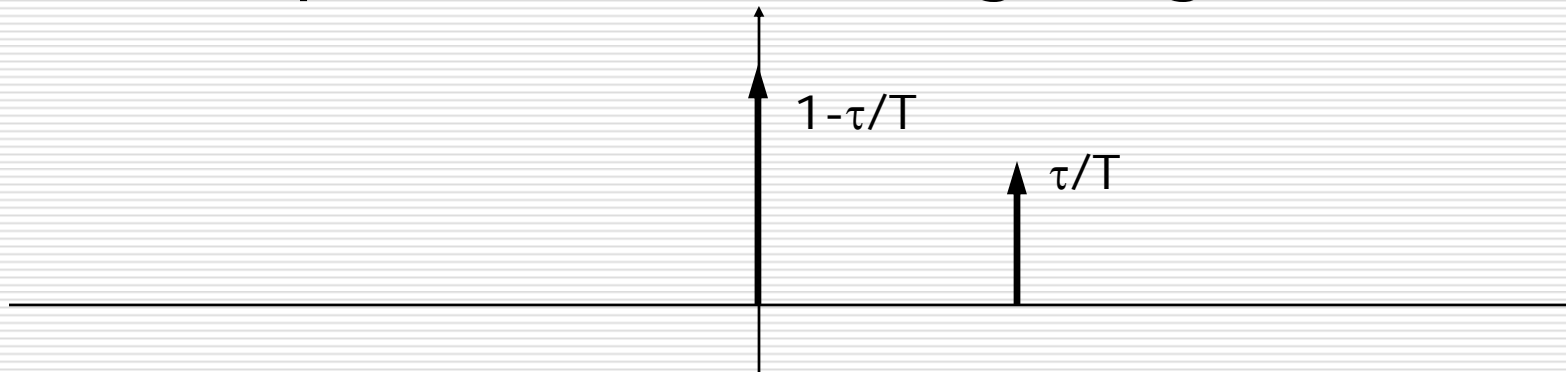

- Thus, the approximate spectrum is

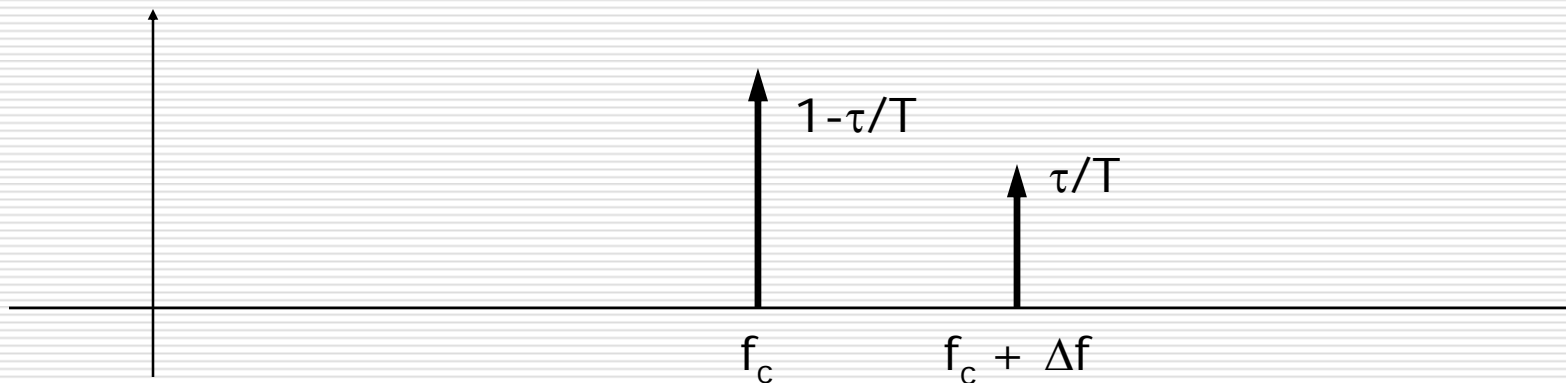


# Ex. 17.2 - Approximate Spectrum

---

□  $\tau/T = 50\text{ms}/100\text{ms} = 0.5$


□  $1 - \tau/T = 0.5$

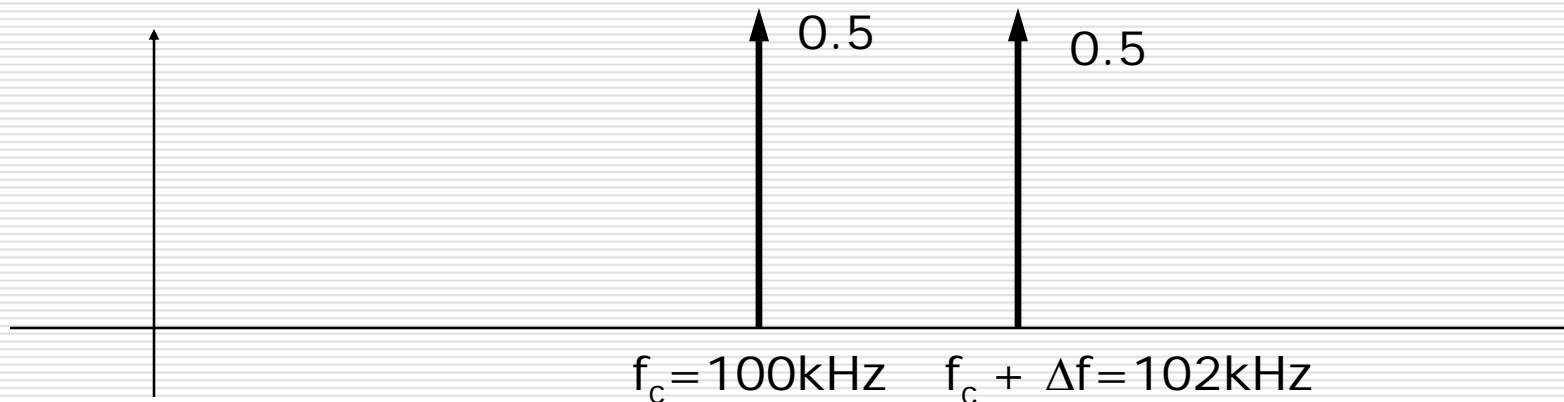

# Ex. 17.2 - Actual Spectrum

---

- Taking the Fourier Transform of the FM signal we have:

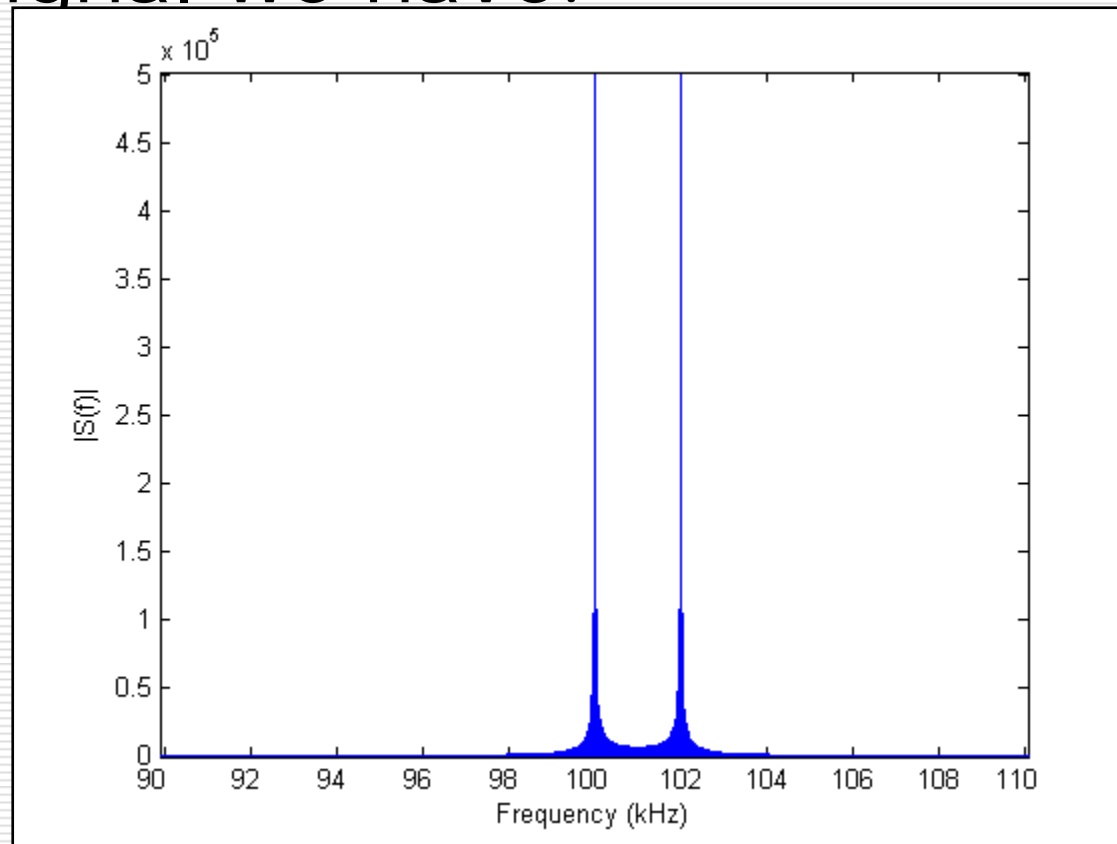


# Broadcast FM

## □ Frequency range:


- 88.1MHz - 91.9 MHz Non-commercial stations
- 92.1MHz - 107.9MHz Commercial stations
- Bandwidth - 200kHz
- Message signal is Frequency Division Multiplexed for stereo sound. Composite message signal contains right and left channels and pilot for coherent demodulation of stereo info.

$$m(t) = [m_L(t) + m_R(t)] + [m_L(t) - m_R(t)]\cos(4\pi f_p t) + K \cos(2\pi f_p t)$$

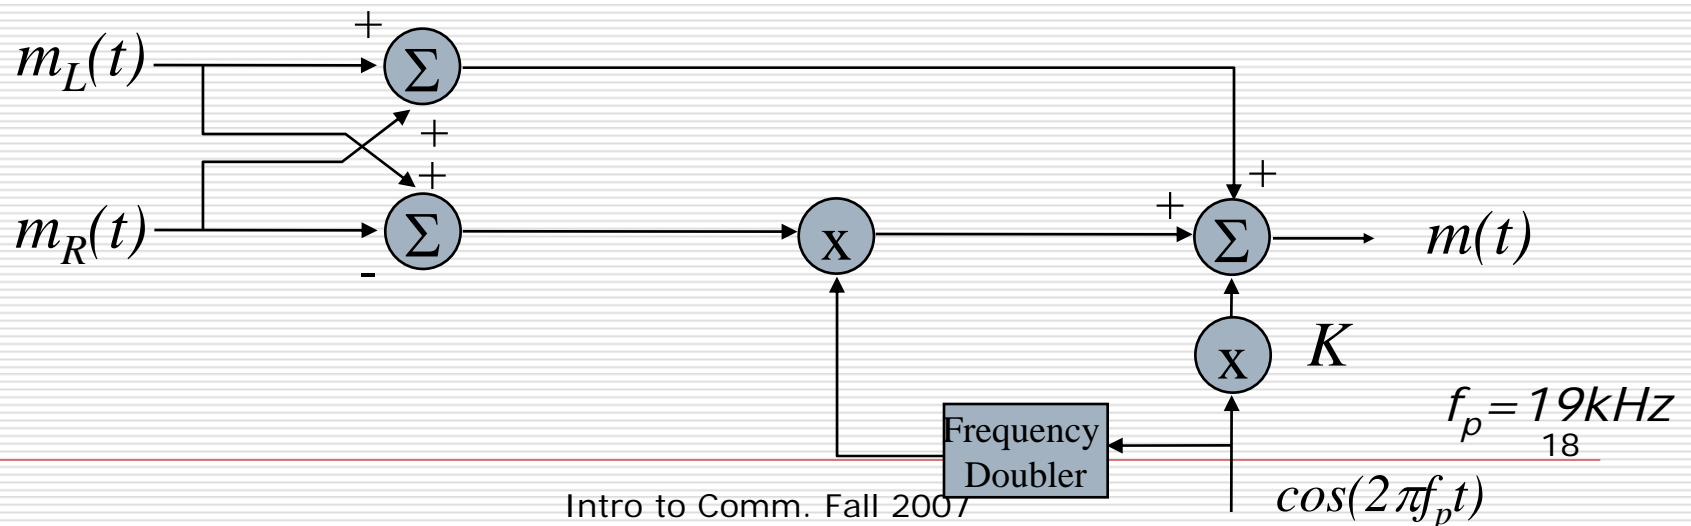

# Broadcast FM

- Spectrum of composite message signal
- Monophonic receivers only detect the bottom portion of the signal using standard FM receiver. Stereo receivers demodulate both portions and recreate left and right channels.

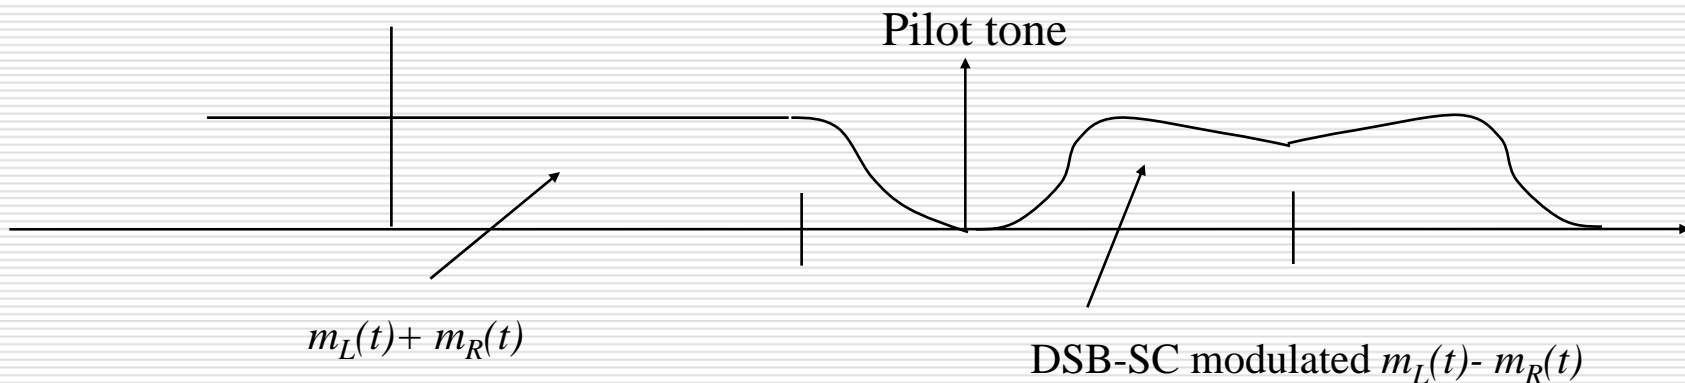

$$m(t) = [m_L(t) + m_R(t)] + [m_L(t) - m_R(t)] \cos(4\pi f_p t) + K \cos(2\pi f_p t)$$

$$f_p = 19\text{kHz}$$


19

# Broadcast FM Specifications

---


- The entire composite message signal is applied to an FM transmitter with
  - $\Delta f = 75\text{kHz}$ 
    - $k_f = 75000$  if  $V_p = 1$
  - $W = 15\text{kHz}$  (music)
  - $f_c = 88.1 - 107.9$  in 200kHz increments
    - $B \sim 200\text{kHz}$
- According to Carson's Rule
  - $B = 2\Delta f + 2W = 180\text{kHz}$
- Modulation Index:  $D = \Delta f / W = 5$ 
  - Wideband FM

# Broadcast FM - Superheterodyne Receiver

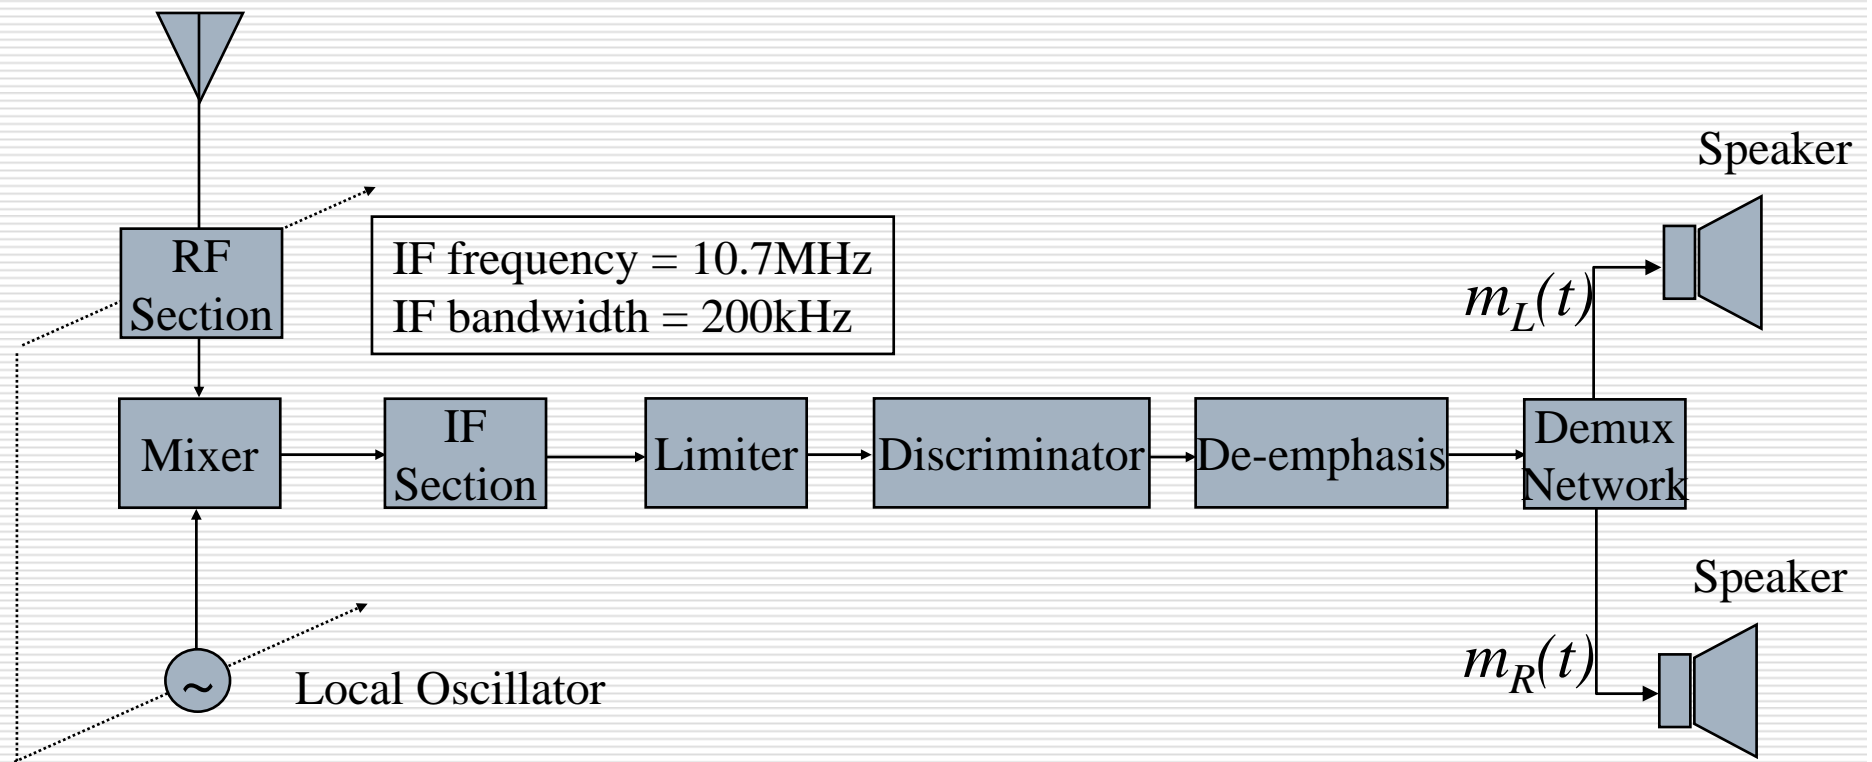

- Limiter removes amplitude modulation
- Discriminator performs frequency demodulation
- De-emphasis removes high band gain and improves SNR
- Demux network recovers right and left channels for stereo systems
- (Monophonic receivers do not have the this part. They use the  $m_L(t) + m_R(t)$  signal)

# FM Broadcast - Demux Network

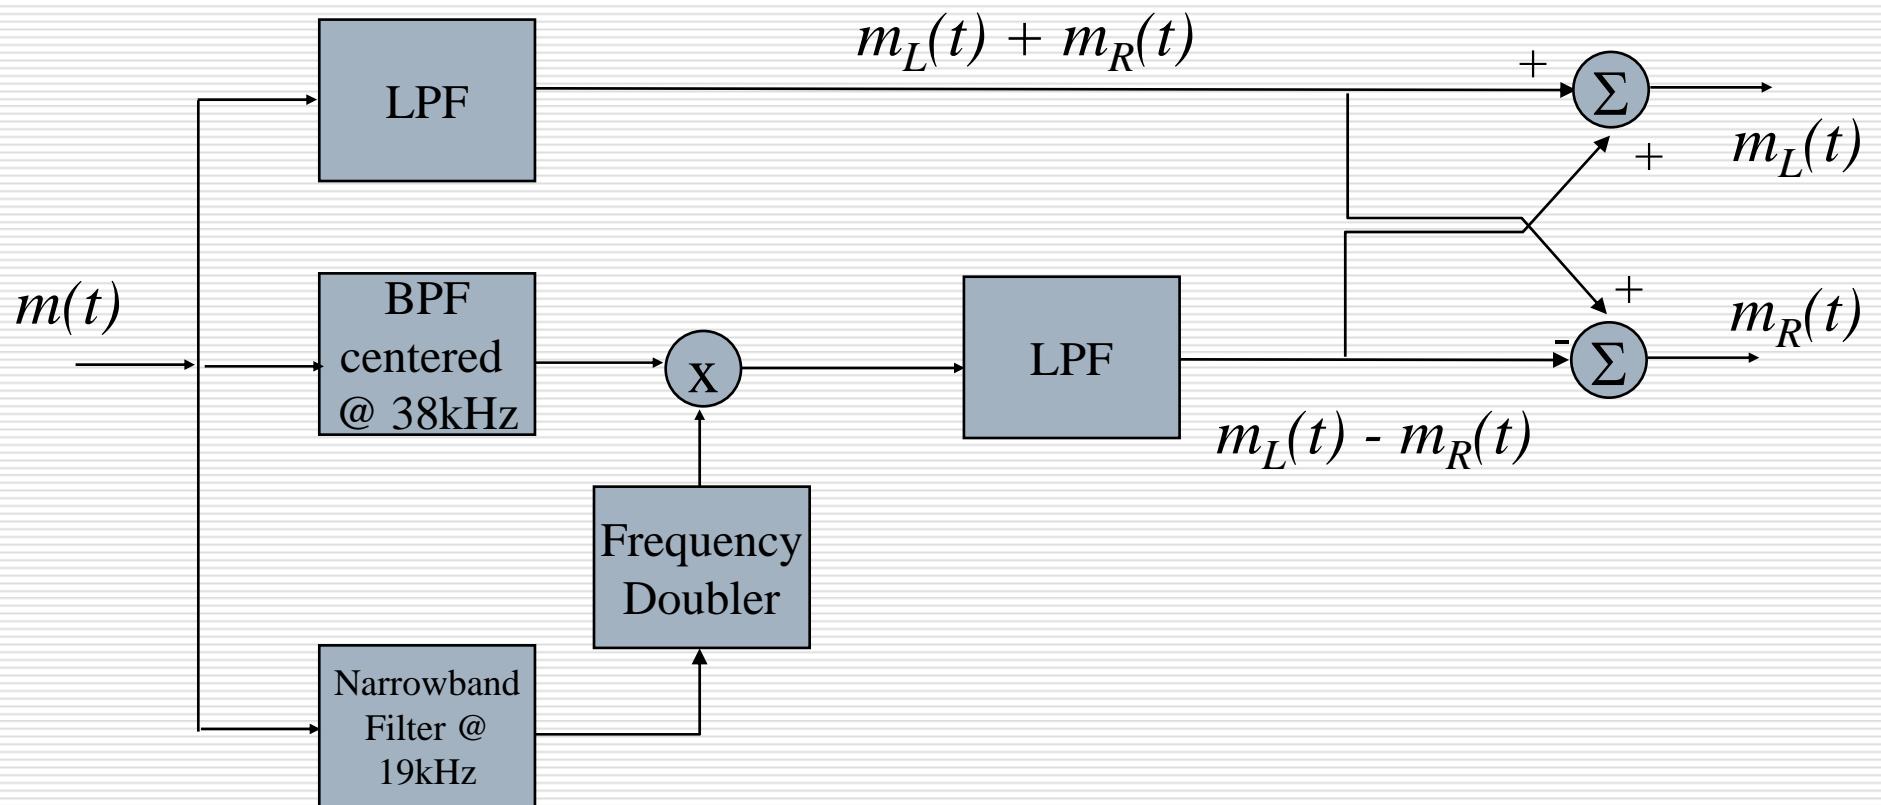


# Broadcast TV - Audio Signal

---

- FM signal with carrier located 4.5MHz above the picture carrier
- $\Delta f = 25\text{kHz}$
- $W = 15\text{kHz}$
- $B \sim 2\Delta f + 2W = 80\text{kHz}$
- $D = \Delta f / B = 1.67$ 
  - wideband but not real wide

# Example – Analog TV (Channel 7)

---

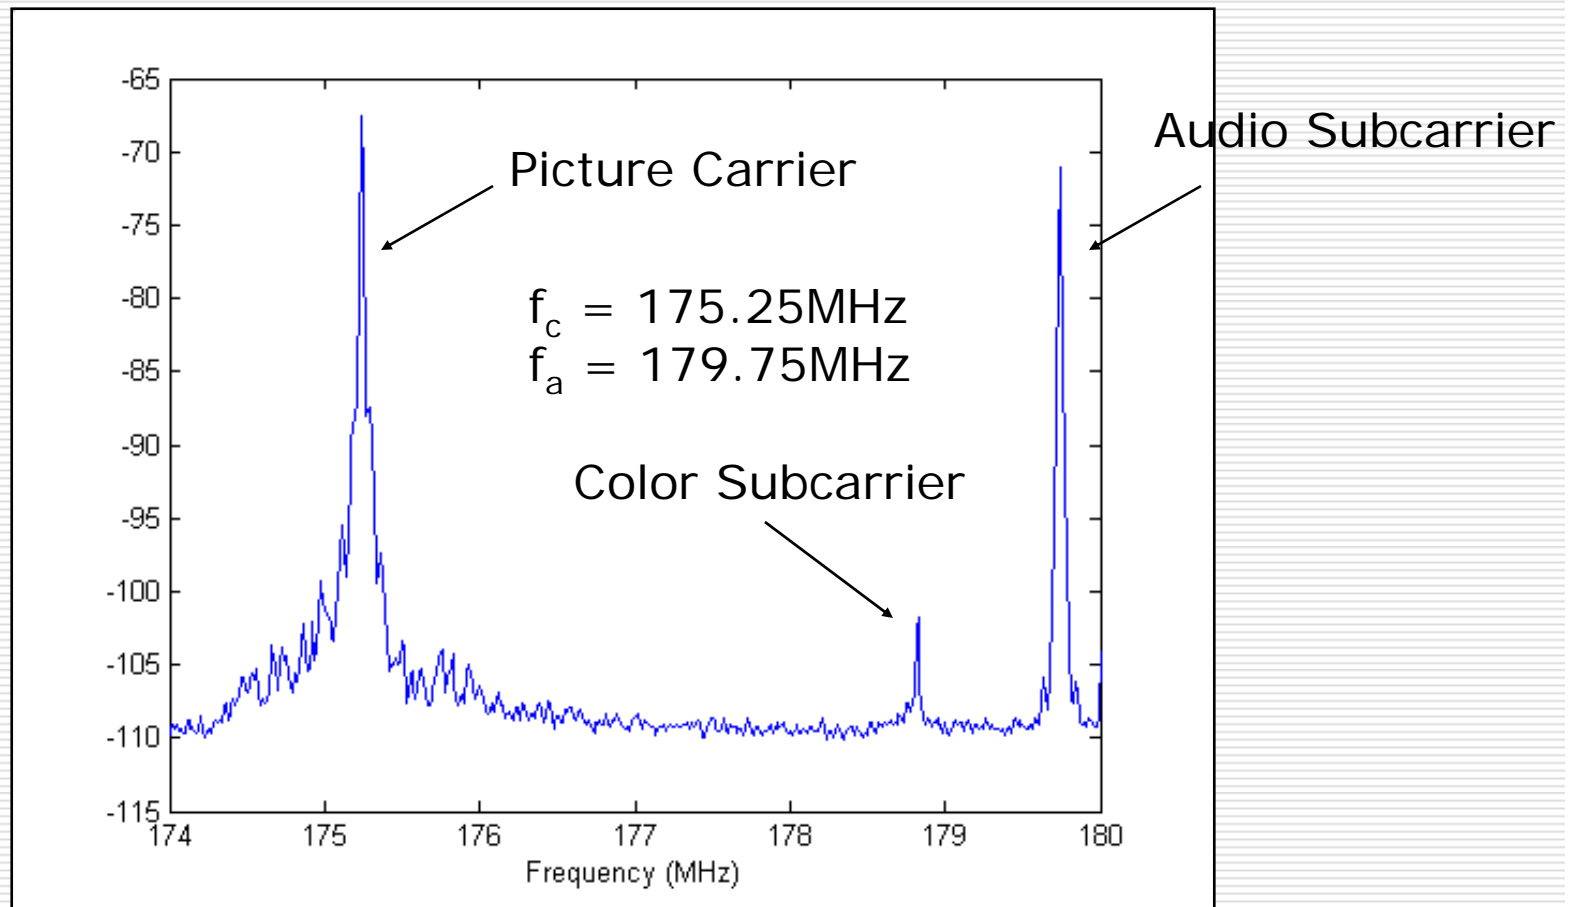

# Digital Communications



---

- While FM is an analog communications technique, the basic idea can also be used with digital modulation
- If we modulate the signal with a digital waveform (+1/-1 modulated square pulses representing data bits 1/0) and use  $\Delta f = R_b/2$  where  $R_b$  is the bit rate we have a digital modulation scheme known as Binary Frequency Shift Keying (BFSK)

# Example

$$R_b = R_s = 1\text{bps}$$

$$f_c = 5\text{Hz} \rightarrow f_1 = 4.5\text{Hz}, f_2 = 5.5\text{Hz}$$

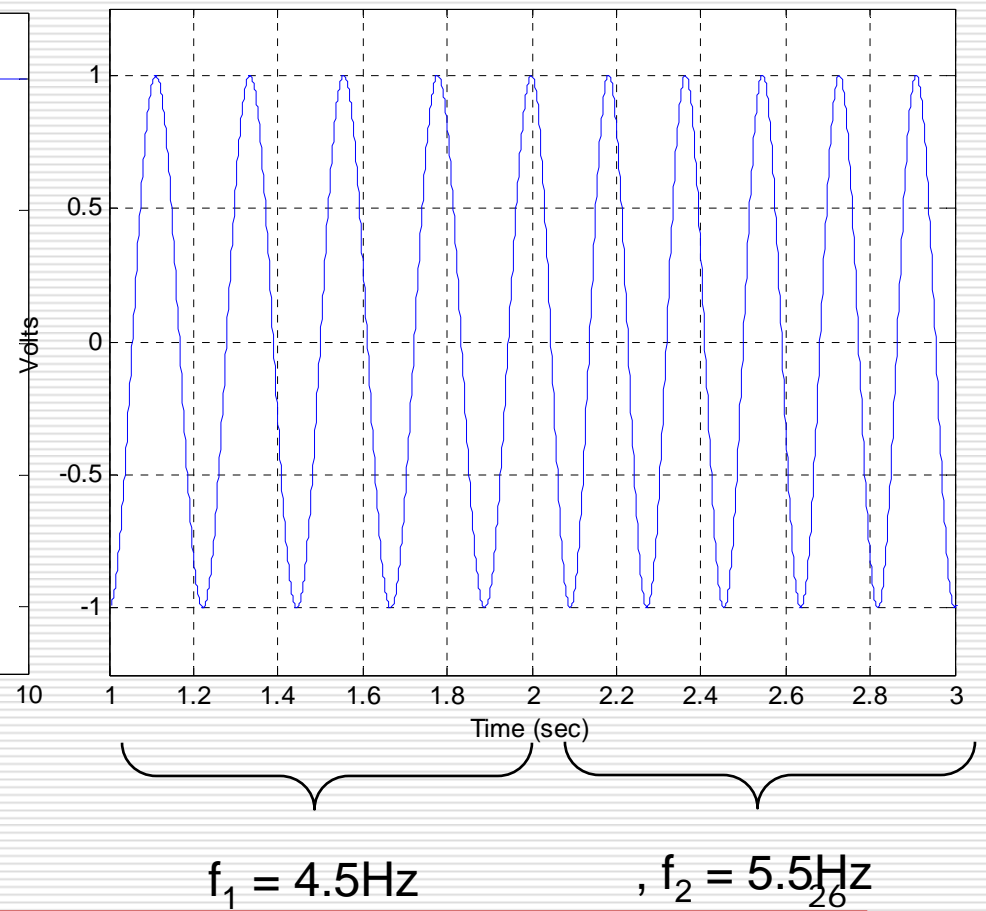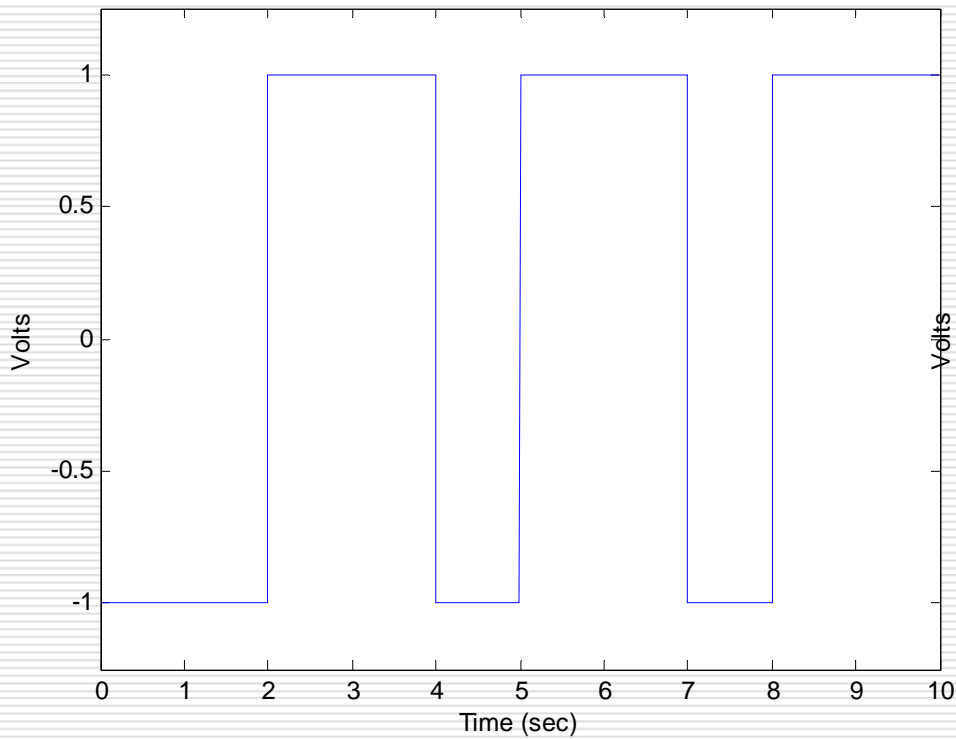

# Summary

---

- In this lecture we have presented a few examples of FM modulation
- We have now discussed AM and FM modulation schemes fairly thoroughly, particularly in terms of their spectral properties, transmitter design and receiver design.
- In the coming classes we will turn to performance
  - FM generally outperforms AM (i.e., achieves a higher SNR at the output of the system) in exchange for higher bandwidth